DOMOTIKLED

Shelly | Explore the **POSSIBILITIES**

PRODUCT CATALOGUE



SMART HOME & FACILITY AUTOMATION

Haga que su hogar y sus instalaciones sean inteligentes

Shellyi es una línea de dispositivos de automatización del hogar que permite a los clientes controlar su hogar.

Directamente a través de un teléfono móvil o con el asistente de hogar que prefieras. Los dispositivos Shelly son retrofit, lo que los hace compatibles con cualquier instalación eléctrica sin necesidad de modificaciones ni mejoras adicionales. Con Shelly puedes:

- Controle las luces ajustando el brillo y los colores, y configure horarios
- personalizados. Controle los electrodomésticos o equipos de oficina desde
- cualquier lugar. Ahorre energía y dinero con una medición precisa de la
- energía. Configure funciones de automatización personalizadas. Monitoree
- la temperatura, la humedad y el brillo. Reciba notificaciones inmediatas en
- caso de cualquier cambio de estado. Control del consumo de energía.
-


Todos los dispositivos Shelly están diseñados para ofrecer el máximo confort de vida, seguridad y fácil instalación.



Global structure



Shelly Smart Control

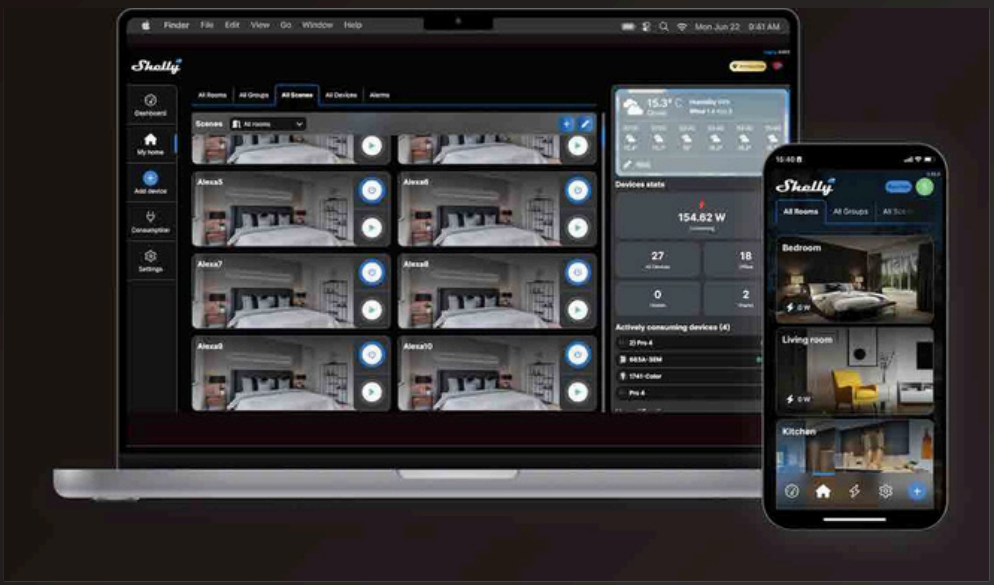

Download on the App Store

GET IT ON Google Play

EXPLORE IT ON AppGallery

Easy device inclusion

Custom dashboards

Smart schedules & scenes

Compatible with Alexa

Energy monitoring

Electricity bills control

Premium

AI Models

Offline Device Notifications

Virtual Devices

Integrations



Home Automation Platforms

Home Assistant
Homey
openHAB
Domoticz
ioBroker
Node-RED
Symcon
Nymea
Hubitat
HomeSeer

Protocols & APIs

MQTT
REST API
CoAP
mDNS
HTTP/HTTPS
Matter
Supported for Gen3 & Gen4 devices
Zigbee
Supported from Gen4 devices
KNX net/IP Integration

Tasmota
ESPHome
Control4
Crestron
URC

All trademarks are the property of their respective owners.

Typically Used For...


Lights


Heating & Cooling



Appliances


Doorbell


Irrigation


Garage Door


Pool automation


Power monitoring


Floor heating


Water manifolds


Cover & Blinds


Load shedding


Valves


Energy monitoring


Energy saving


Photovoltaic


Electric chargers


No neutral installation


Dimming


LED strips


Color


Scene activation


Room management


Centralized control



Thermostat


Motion detection


Leak & Gas detection



Region standards

GLOBAL

Majority of markets

UK

United Kingdom

EU

European Union

ANZ

Australia + New Zealand

US


United States

IT

Italy




Switch & Socket Box Types

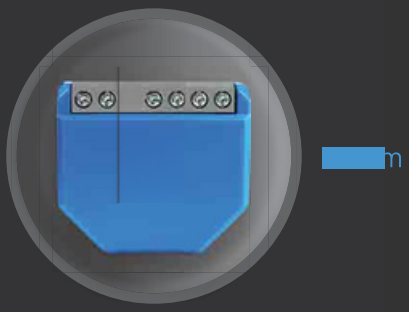

EU Standard Wall Box




US + Canada Gang Box

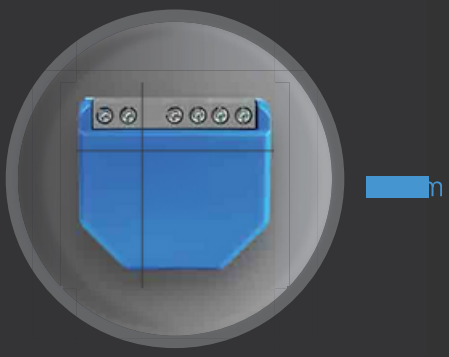


Depth 35–40 mm


Danish Wall Box

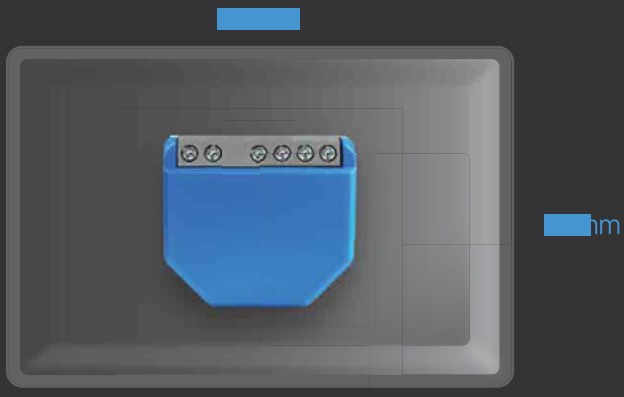

Italian Box

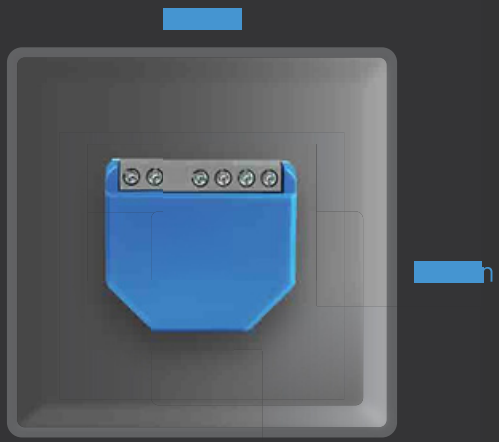

UK Back Box

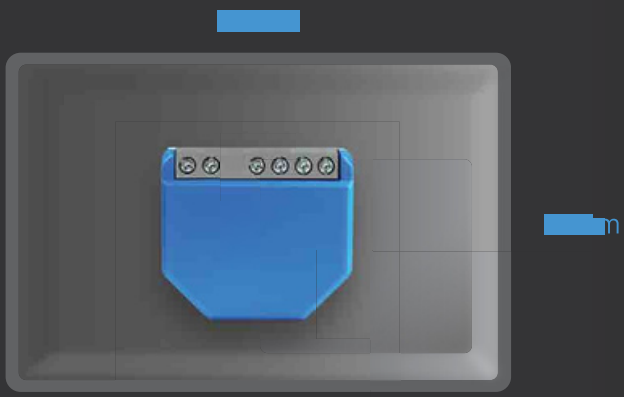

Australian / New Zealand Wall Box

Pro devices on DIN rail





Connectivity

Wi-Fi 4

Control and monitor your smart devices remotely without a hub using an existing Wi-Fi network.

Frequency: 2400 - 2483.5 MHz
Max RF power: < 20 dBm
Operational range:
• Up to 30 m / 100 ft indoors
• Up to 50 m / 160 ft outdoors

Wi-Fi 6

Control and monitor your smart devices remotely without a hub using an existing Wi-Fi network.

Frequency: 2401 - 2473 MHz
Max RF power: < 20 dBm
Operational range:
• Up to 30 m / 100 ft indoors
• Up to 50 m / 160 ft outdoors

Bluetooth 4.2

Add devices quickly and easily via Bluetooth, and enjoy fast, hassle-free setup without additional hubs.

Frequency: 2400 - 2483.5 MHz
Max RF power: < 4 dBm
Operational range:
• Up to 10 m / 100 ft indoors
• Up to 30 m / 160 ft outdoors

Bluetooth 5.0

Add devices quickly and easily via Bluetooth, and enjoy fast, hassle-free setup without additional hubs.

Frequency: 2402 - 2480 MHz
Max RF power: < 20 dBm
Operational range:
• Up to 10 m / 100 ft indoors
• Up to 30 m / 160 ft outdoors

Zigbee

Use a reliable, low-power Zigbee mesh network for extended coverage. A Zigbee hub is required.

Protocol: 802.15.4
Frequency: 2405 - 2480 MHz
Max RF power: < 20 dBm
Operational range:
• Up to 100 m / 328 ft indoors
• Up to 300 m / 984 ft outdoors

Z-Wave

Ensure a secure Sub-GHz smart home integration through a trusted mesh network. A Z-Wave hub is required.

Protocol: Z-Wave
Frequency: 868.4 MHz [EU]; 908.4 MHz [US]; 919.8 MHz [ANZ]
Max RF power: < 25 mW
Operational range:
• Up to 40 m / 131 ft indoors

Matter

Integrate your Shelly devices into any major smart home platform like Apple, Google, or Alexa—no custom setup needed.

LAN

A wired, ultra-reliable connectivity

Conectividad

Wi-Fi 4

Controle y monitoree sus dispositivos inteligentes de forma remota sin un concentrador utilizando una red Wi-Fi existente.

Frecuencia: 2400 - 2483,5 MHz

Potencia máxima de RF: < 20 dBm

Rango operativo:

- **Hasta 30 m / 100 pies en interiores**
- Hasta 50 m / 160 pies en exteriores

Wi-Fi 6

Controle y monitoree sus dispositivos inteligentes de forma remota sin un concentrador utilizando una red Wi-Fi existente.

Frecuencia: 2401 - 2473 MHz

Potencia máxima de RF: < 20 dBm

Rango operativo:

- **Hasta 30 m / 100 pies en interiores**
- Hasta 50 m / 160 pies en exteriores

Bluetooth 4.2

Agregue dispositivos de forma rápida y sencilla a través de Bluetooth y disfrute de una configuración rápida y sin complicaciones sin concentradores adicionales.

Frecuencia: 2400 - 2483,5 MHz

Potencia máxima de RF: < 4 dBm

Rango operativo:

- **Hasta 10 m / 100 pies en interiores**
- Hasta 30 m / 160 pies en exteriores

Bluetooth 5.0

Agregue dispositivos de forma rápida y sencilla a través de Bluetooth y disfrute de una configuración rápida y sin complicaciones sin concentradores adicionales.

Frecuencia: 2402 - 2480 MHz

Potencia máxima de RF: < 20 dBm

Rango operativo:

- **Hasta 10 m / 100 pies en interiores**
- Hasta 30 m / 160 pies en exteriores

Zigbee

Utilice una red de malla Zigbee fiable y de bajo consumo para una mayor cobertura. Se requiere un concentrador Zigbee. Protocolo: 802.15.4 Frecuencia: 2405-2480 MHz Potencia máxima de RF: < 20 dBm Alcance operativo: • Hasta 100 m/328 pies en interiores • Hasta 300 m/984 pies en exteriores

Z-Wave

Garantice una integración segura de hogares inteligentes sub-GHz mediante una red de malla confiable. Se requiere un concentrador Z-Wave.

Protocolo: Z-Wave Frecuencia: 868,4

MHz [UE];
908,4 MHz [EE. UU.]; 919,8 MHz [ANZ]
Potencia máxima de RF: < 25 mW

Rango operativo:


- **Hasta 40 m / 131 pies en interiores**

Asunto

Integre sus dispositivos Shelly en cualquier plataforma doméstica inteligente importante como Apple, Google o Alexa, sin necesidad de configuración personalizada.

Y

Una conectividad cableada y ultra confiable

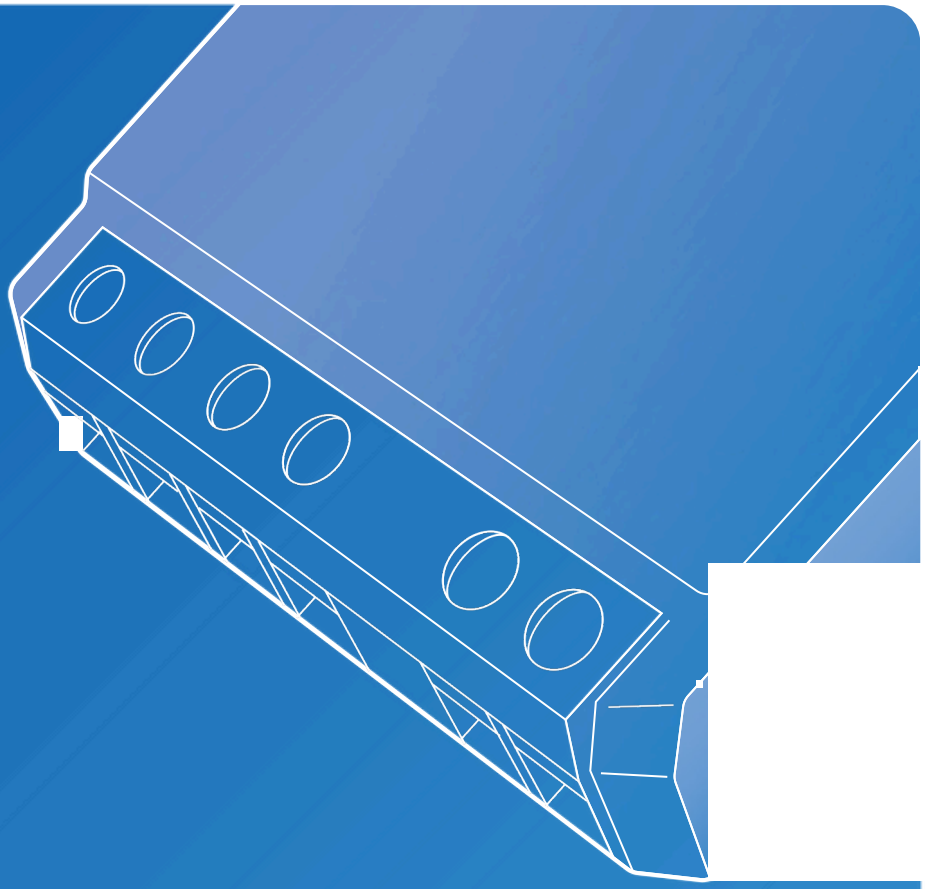

1 channel relays
with dry contact

TYPICALLY USED FOR

Lights

Heating & Cooling

OFF ON

Appliances


Doorbell

Irrigation

Garage Door

Pool automation

1 CHANNEL RELAYS WITH DRY CONTACT

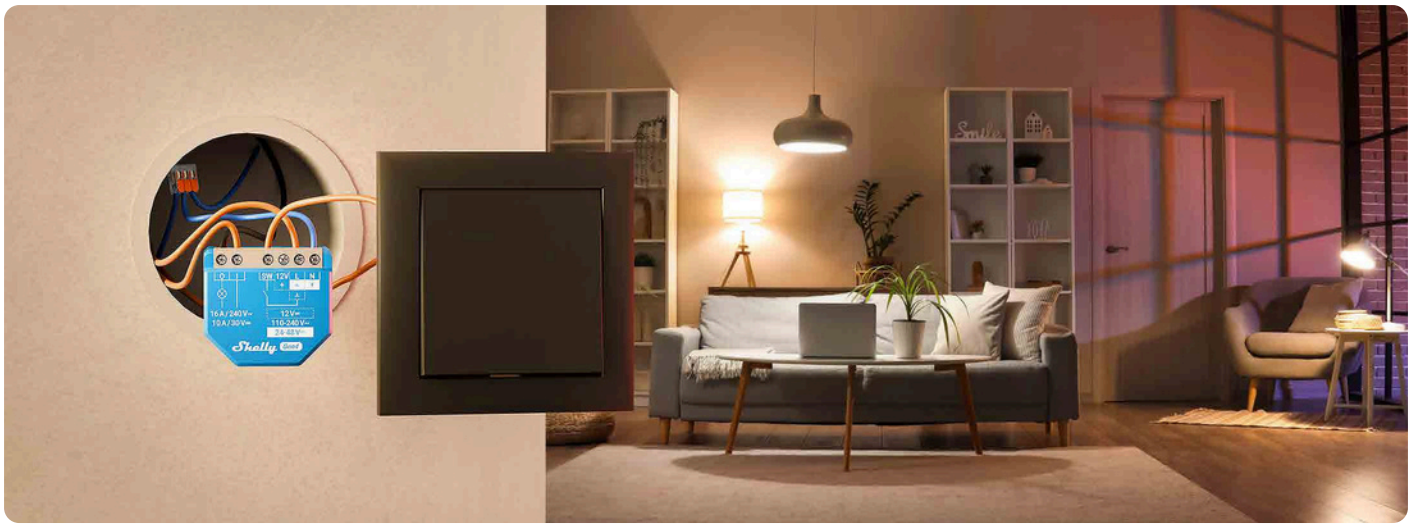

GLOBAL



Shelly
1 Gen3

Power supply	**110-240 V~ / 24-48 V⎓ / 12 V⎓**
Max load	**16 A (240 V~); 10 A (30 V⎓)**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2**
CPU	**ESP-Shelly-C38F**
Flash Memory	**8 MB**
Size (HxWxD)	**37x42x16 mm / 1.46x1.65x0.63 inch**
Weight	**26 g / 0.92 oz**
Certifications	**RED, LVD, EMC, ROHS**

more info

GLOBAL



Shelly
1 Gen4

Power supply	**110-240 V~ / 24-48 V⎓ / 12 V⎓**
Max load	**16 A (240 V~); 10 A (30 V⎓)**
Connectivity	**Wi-Fi 6** **Bluetooth 5** **Zigbee 802.15.4**
CPU	**ESP-Shelly-C68F**
Flash Memory	**8 MB**
Size (HxWxD)	**37x42x16 mm / 1.46x1.65x0.63 inch**
Weight	**26 g / 0.92 oz**
Certifications	**RED, LVD, EMC, ROHS**

more info

EU
US
ANZ



Shelly
Wave 1

Power supply	**110-240 V~ / 24-48 V⎓ / 12 V⎓**
Max load	**EU: 16 A (240 V~); 10 A (30 V⎓); US: 15 A; ANZ: 16 A**
Connectivity	**ZWLR** **US: 912 MHz** **Z-Wave Plus** **EU: 868.4 MHz** **US: 908.4 MHz** **ANZ: 919.8 MHz**
CPU	**Z-Wave® S800**
Size (HxWxD)	**37x42x16 mm / 1.46x1.65x0.63 inch**
Weight	**26 g / 0.92 oz**
Certifications	**RED, LVD, EMC, ROHS, FCC, SA, UL**

more info

1 CHANNEL RELAYS WITH DRY CONTACT



GLOBAL



Shelly
1 Mini Gen3

Power supply	**110-240 V~**
Max load	**8 A (240 V~); 5 A (30 V⎓)**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2**
CPU	**ESP-Shelly-C38F**
Flash Memory	**8 MB**
Size (HxWxD)	**29x34x16 mm /** **1.34x1.11x0.63 inch**
Weight	**19 g / 0.65 oz**
Certifications	**RED, LVD, EMC, ROHS**

more info

GLOBAL



Shelly
1 Mini Gen4

Power supply	**110-240 V~**
Max load	**8 A (240 V~) ; 5 A (30 V⎓)**
Connectivity	**Wi-Fi 6** **Bluetooth 5** **Zigbee 802.15.4**
CPU	**ESP-Shelly-C68F**
Flash Memory	**8 MB**
Size (HxWxD)	**29x34x16 mm /** **1.34x1.11x0.63 inch**
Weight	**19 g / 0.65 oz**
Certifications	**RED, LVD, EMC, ROHS**

more info

EU
US
ANZ



Shelly
Wave 1 Mini

Power supply	**110-240 V~**
Max load	**8 A (240 V~) ; 5 A (30 V⎓)**
Connectivity	**ZWLR** **EU: 864 MHz** **US: 912 MHz** **Z-Wave Plus** **EU: 868.4 MHz** **US: 908.4 MHz** **ANZ: 919.8 MHz**
CPU	**Z-Wave® S800**
Size (HxWxD)	**29x34x16 mm /** **1.34x1.11x0.63 inch**
Weight	**19 g / 0.65 oz**
Certifications	**RED, LVD, EMC, ROHS, FCC, SA**

more info

1 CHANNEL RELAYS WITH DRY CONTACT



GLOBAL



Shelly Pro 1

Power supply	**110-240 V~**
Max load	**16 A / 15 A UL Version**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2** **LAN**
CPU	**ESP32-D0WDQ6**
Flash Memory	**8 MB**
Size (HxWxD)	**94x19x69 mm / 3.70x0.75x2.71 in**
Weight	**63 g / 2.22 oz.**
Certifications	**RED, LVD, EMC, ROHS, UL, RCM**

more info


EU
US
ANZ



Shelly Wave Pro 1

Power supply	**110-240 V~**
Max load	**EU/ANZ: 16 A (240 V~);** **US: 15 A**
Connectivity	**ZWLR** **US: 912 MHz** **Z-Wave Plus** **EU: 868.4 MHz** **US: 908.4 MHz** **ANZ: 919.8 MHz**
CPU	**Z-Wave® S800**
Size (HxWxD)	**94x19x69 mm / 3.70x0.75x2.71 in**
Weight	**60 g / 2.12 oz.**
Certifications	**RED, LVD, EMC, ROHS, RCM, FCC, SA**

more info

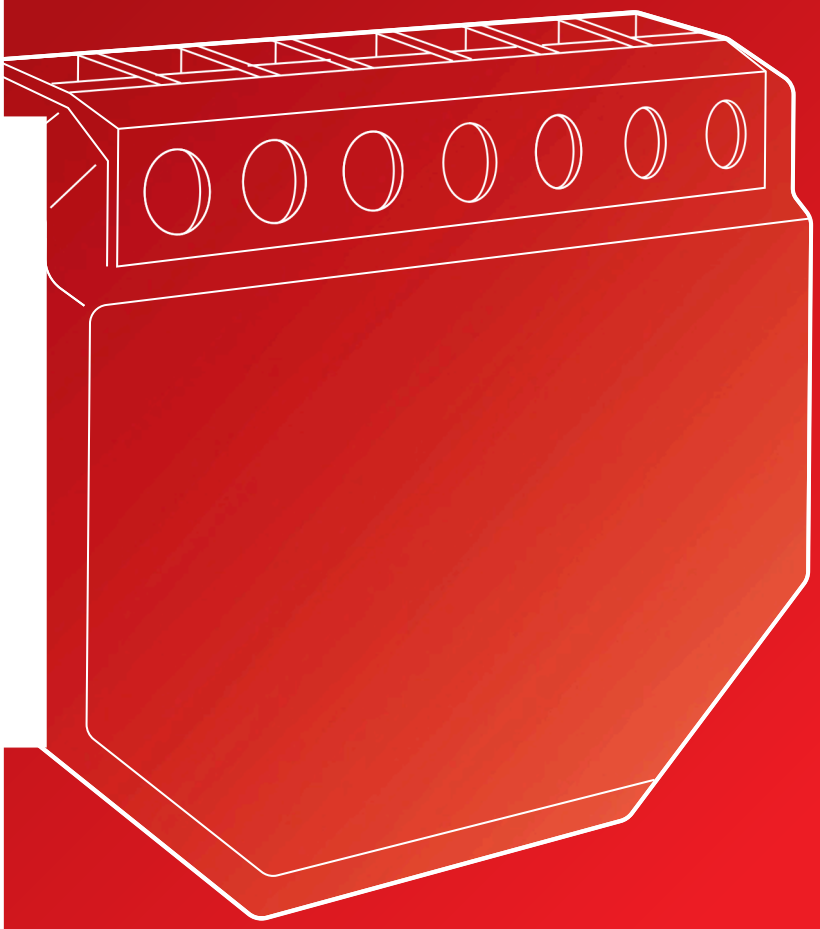

1 channel relays
with power metering

TYPICALLY USED FOR


Power monitoring

Lights

Appliances

Floor heating

1-CHANNEL RELAYS WITH POWER METERING

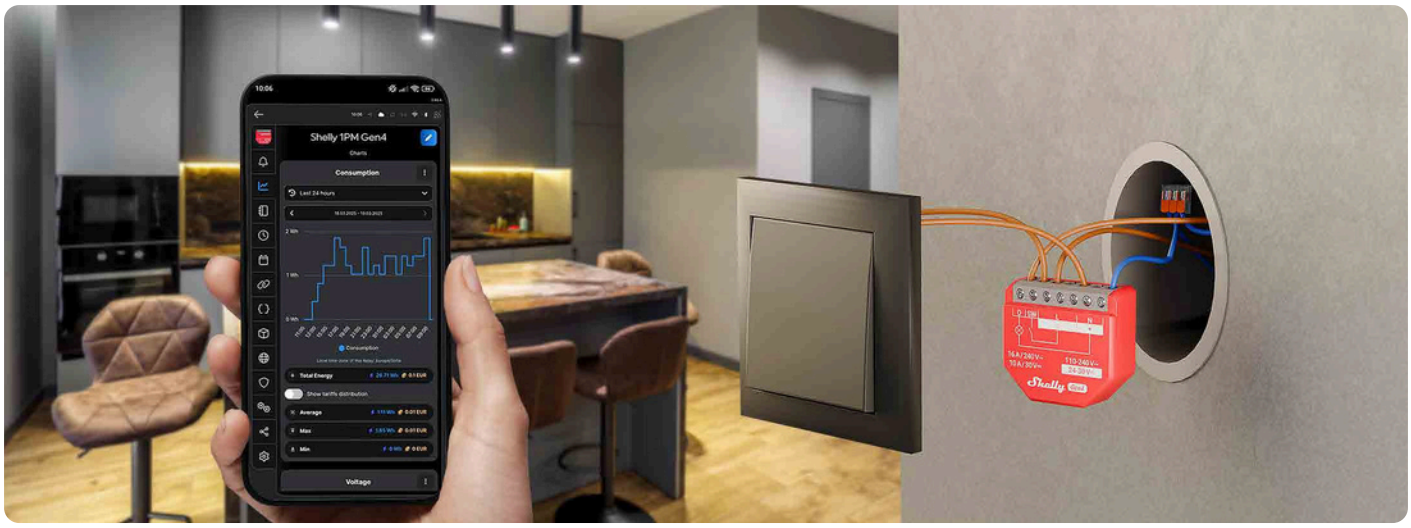

GLOBAL



Shelly
1PM Gen3

Power supply	**110-240 V~ / 24-30 V⎓**
Max load	**16 A (240 V~); 10 A (30 V⎓)**
Connectivity	**Wi-Fi 4 Bluetooth 4.2**
CPU	**ESP-Shelly-C38F**
Flash Memory	**8 MB**
Size (HxWxD)	**37x42x16 mm / 1.46x1.65x0.63 inch**
Weight	**26 g / 0.92 oz**
Certifications	**RED, LVD, EMC, ROHS**

more info

GLOBAL



Shelly
1PM Gen4

Power supply	**110-240 V~ / 24-30 V⎓**
Max load	**16 A (240 V~); 10 A (30 V⎓)**
Connectivity	**Wi-Fi 6 Bluetooth 5 Zigbee 802.15.4**
CPU	**ESP-Shelly-C68F**
Flash Memory	**8 MB**
Size (HxWxD)	**37x42x16 mm / 1.46x1.65x0.63 inch**
Weight	**26 g / 0.92 oz**
Certifications	**RED, LVD, EMC, ROHS**

more info

EU
US
ANZ




Shelly
Wave 1PM

Power supply	**EU/US: 110-240 V~ / 24-30 V⎓; ANZ: 110-240 V~**
Max load	**EU: 16 A (240 V~); 10 A (30 V⎓); US: 15 A; 10 A**
Connectivity	**ZWLR** **US: 912 MHz** **Z-Wave Plus** **EU: 868.4 MHz** **US: 908.4 MHz** **ANZ: 919.8 MHz**
CPU	**Z-Wave® S800**
Size (HxWxD)	**37x42x16 mm / 1.46x1.65x0.63 inch**
Weight	**26 g / 0.92 oz**
Certifications	**RED, LVD, EMC, ROHS, FCC, SA, UL**

more info

1-CHANNEL RELAYS WITH POWER METERING

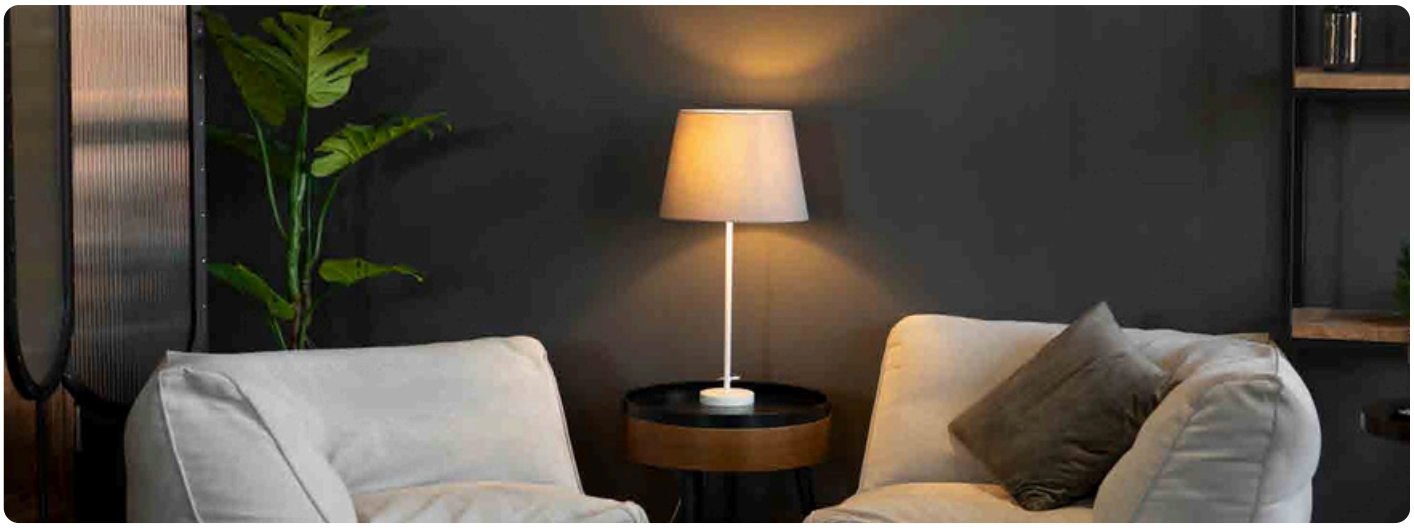

GLOBAL



Shelly
1PM Mini Gen3

Power supply	**110-240 V~**
Max load	**8 A (240 V~)**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2**
CPU	**ESP-Shelly-C38F**
Flash Memory	**8 MB**
Size (HxWxD)	**29x34x16 mm /** **1.34x1.11x0.63 inch**
Weight	**19 g / 0.65 oz**
Certifications	**RED, LVD, EMC, ROHS**

more info

GLOBAL



Shelly
1PM Mini Gen4

Power supply	**110-240 V~**
Max load	**8 A (240 V~)**
Connectivity	**Wi-Fi 6** **Bluetooth 5** **Zigbee 802.15.4**
CPU	**ESP-Shelly-C68F**
Flash Memory	**8 MB**
Size (HxWxD)	**29x34x16 mm /** **1.34x1.11x0.63 inch**
Weight	**19 g / 0.65 oz**
Certifications	**RED, LVD, EMC, ROHS**

more info


EU
US
ANZ



Shelly
Wave 1PM Mini

Power supply	**110-240 V~**
Max load	**8 A (240 V~)**
Connectivity	**ZWLR** **EU: 864 MHz** **US: 912 MHz** **Z-Wave Plus** **EU: 868.4 MHz** **US: 908.4 MHz** **ANZ: 919.8 MHz**
CPU	**Z-Wave® S800**
Size (HxWxD)	**29x34x16 mm /** **1.34x1.11x0.63 inch**
Weight	**19 g / 0.65 oz**
Certifications	**RED, LVD, EMC, ROHS, FCC, SA**

more info

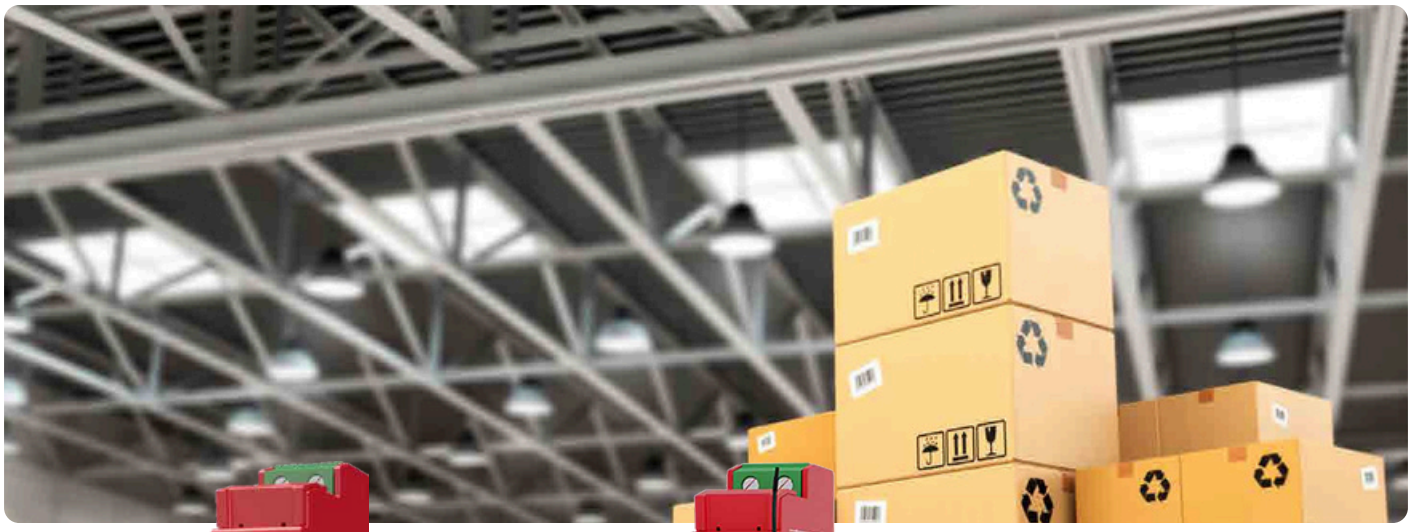

GLOBAL



Shelly
Pro 1PM

Power supply	**110-240 V~**
Max load	**16 A / 15 A UL Version**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2** **LAN**
CPU	**ESP32-D0WDQ6**
Flash Memory	**8 MB**
Size (HxWxD)	**94x19x69 mm / 3.70x0.75x2.71 in**
Weight	**63 g / 2.22 oz.**
Certifications	**RED, LVD, EMC, ROHS, UL, RCM**

more info

EU
US
ANZ




Shelly
Wave Pro 1PM

Power supply	**110-240 V~**
Max load	**EU/ANZ: 16 A (240 V~);** **US: 15 A**
Connectivity	**ZWLR** **US: 912 MHz** **Z-Wave Plus** **EU: 868.4 MHz** **US: 908.4 MHz** **ANZ: 919.8 MHz**
CPU	**Z-Wave® S800**
Size (HxWxD)	**94x19x69 mm / 3.70x0.75x2.71 in**
Weight	**60 g / 2.12 oz.**
Certifications	**RED, LVD, EMC, ROHS, RCM, FCC, SA**

more info

2 channel relays

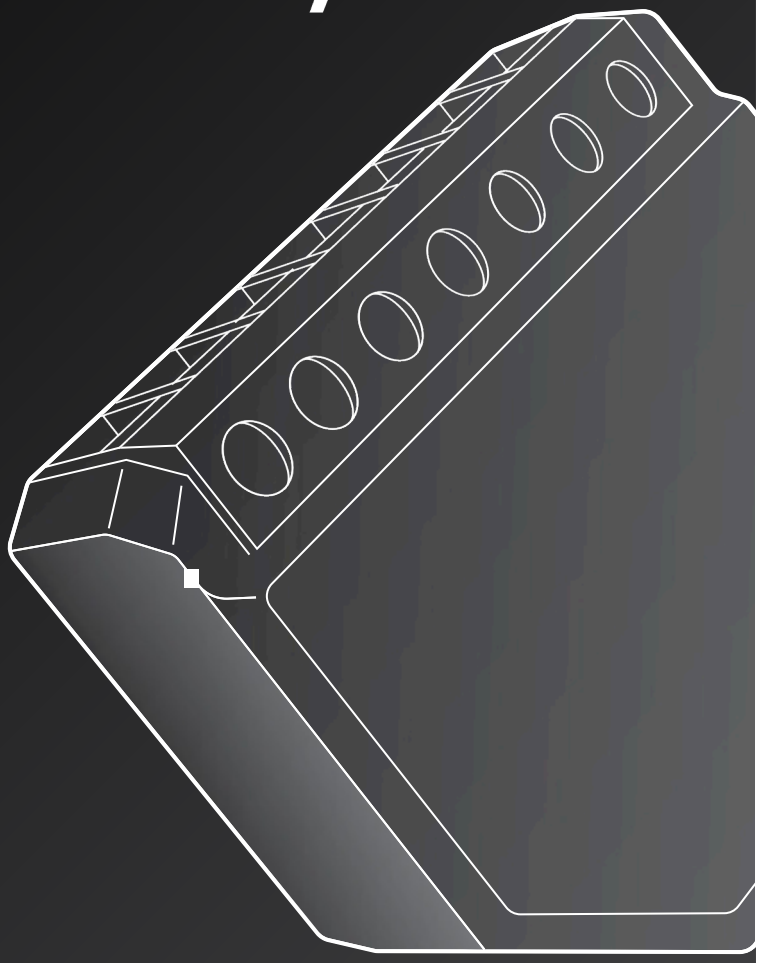

TYPICALLY USED FOR

Power monitoring

Cover & Blinds

Lights

Appliances

Irrigation

Floor heating



GLOBAL



Shelly
2PM Gen3

Power supply	**110-240 V~ / 24 V⎓**
Max load	**16 A (240 V~); 10 A (30 V⎓)**
Power metering	**Yes**
Connectivity	**Wi-Fi 4 Bluetooth 4.2**
CPU	**ESP-Shelly-C38F**
Flash Memory	**8 MB**
Size (HxWxD)	**37x42x16 mm / 1.46x1.65x0.63 in**
Weight	**30 g / 1.06 oz**
Certifications	**RED, LVD, EMC, ROHS, RCM**

more info

EU
US
ANZ



Shelly
Wave 2PM

Power supply	**EU: 110-240 V~ / 24 V⎓ ANZ: 110-240 V ~ US: 120 V~**
Max load	**EU/ANZ: 10 A/channel, 16 A total (240 V~) EU: 10 A (30 V⎓) US: 7 A per channel, 14 A total (120 V~)**
Power metering	**Yes**
Connectivity	**ZWLR US: 912 MHz Z-Wave Plus EU: 868.4 MHz US: 908.4 MHz ANZ: 919.8 MHz**
CPU	**Z-Wave® S800**
Size (HxWxD)	**37x42x16 mm / 1.46x1.65x0.63 in**
Weight	**29 g / 1,02 oz**
Certifications	**RED, LVD, EMC, ROHS, RCM, FCC, SA,UL**

more info

EU
US
ANZ



Shelly
Wave Shutter

Power supply	**EU: 110-240 V~ ANZ: 110-240 V ~ US: 120 V~**
Max load	**EU/ANZ: 10 A per channel, (240 V~) US: 7 A per channel, (120 V~)**
Power metering	**Yes**
Connectivity	**Z-Wave Plus EU: 868.4 MHz US: 908.4 MHz ANZ: 919.8 MHz**
CPU	**Z-Wave® S800**
Flash Memory	**512 kB**
Size (HxWxD)	**37x42x16 mm / 1.46x1.65x0.63 in**
Weight	**29 g / 1,02 oz**
Certifications	**RED, LVD, EMC, ROHS, RCM, FCC, SA,UL**

more info



GLOBAL



Shelly
Pro 2PM

Power supply **110-240 V~**

Max load **16 A per channel, 25 A total / 12.5 A UL Version**

Power metering **Yes**

Connectivity **Wi-Fi 4 Bluetooth 4.2 LAN**

CPU **ESP32-D0WDQ6**

Flash Memory **8 MB**

Size (HxWxD) **94x19x69 mm / 3.70x0.75x2.71 in**

Weight **76 g / 2.68 oz**

Certifications **RED, LVD, EMC, ROHS, UL, RCM**

more info

EU
US
ANZ



Shelly
Wave Pro 2PM

Power supply **110-240 V~**

Max load **EU/ANZ: 16 A/channel, 25 A total; US: 12.5 A per channel, 25 A total;**

Power metering **Yes**

Connectivity **ZWLR**
EU: 864 MHz
US: 912 MHz
Z-Wave Plus
EU: 868.4 MHz
US: 908.4 MHz
ANZ: 919.8 MHz

CPU **Z-Wave® S800**

Size (HxWxD) **94x19x69 mm / 3.70x0.75x2.71 in**

Weight **73 g / 2.58 oz.**

Certifications **RED, LVD, EMC, ROHS, RCM, FCC, SA**

more info

EU
US
ANZ



Shelly
Wave Pro Shutter

Power supply **EU: 110-240 V~**
US: 120 V~
ANZ: 110-240 V~

Max load **EU/ANZ: 16 A/channel**
US: 12.5 A/channel

Connectivity **ZWLR**
EU: 864 MHz
US: 912 MHz
Z-Wave Plus
EU: 868.4 MHz
US: 908.4 MHz
ANZ: 919.8 MHz


CPU **Z-Wave® S800**

Size (HxWxD) **94x19x69 ± 0.5 mm / 3.70x0.75x2.71 ± 0.02 in**

Weight **75 g / 2.65 oz.**

Certifications **RED, LVD, EMC, ROHS, RCM, FCC, SA**

more info

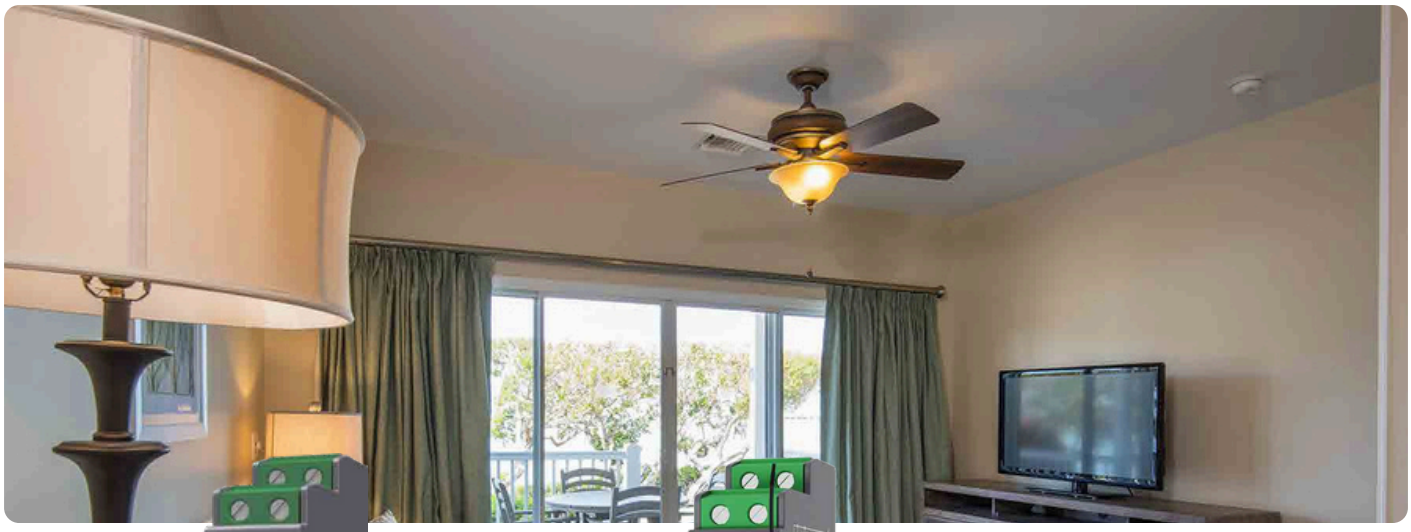

GLOBAL



Shelly
Pro 2

Power supply **110-240 V~**

Max load **16 A / 12.5 A UL Version**

Power metering **No**

Connectivity **Wi-Fi 4**
Bluetooth 4.2
LAN

CPU **ESP32-D0WDQ6**

Flash Memory **8 MB**

Size (HxWxD) **94x19x69 mm / 3.70x0.75x2.71 in**

Weight **76 g / 2.68 oz**

Certifications **RED, LVD, EMC, ROHS, UL, RCM**

more info

EU
US
ANZ



Shelly
Wave Pro 2

Power supply **110-240 V~**

Max load **EU/ANZ: 16 A per channel, 25 A total;**
US: 12.5 A per channel, 25 A total;

Power metering **No**

Connectivity **ZWLR**
US: 912 MHz
Z-Wave Plus
EU: 868.4 MHz
US: 908.4 MHz
ANZ: 919.8 MHz


CPU **Z-Wave® S800**

Size (HxWxD) **94x19x69 mm / 3.70x0.75x2.71 in**

Weight **73 g / 2.58 oz.**

Certifications **RED, LVD, EMC, ROHS, RCM, FCC, SA**

more info

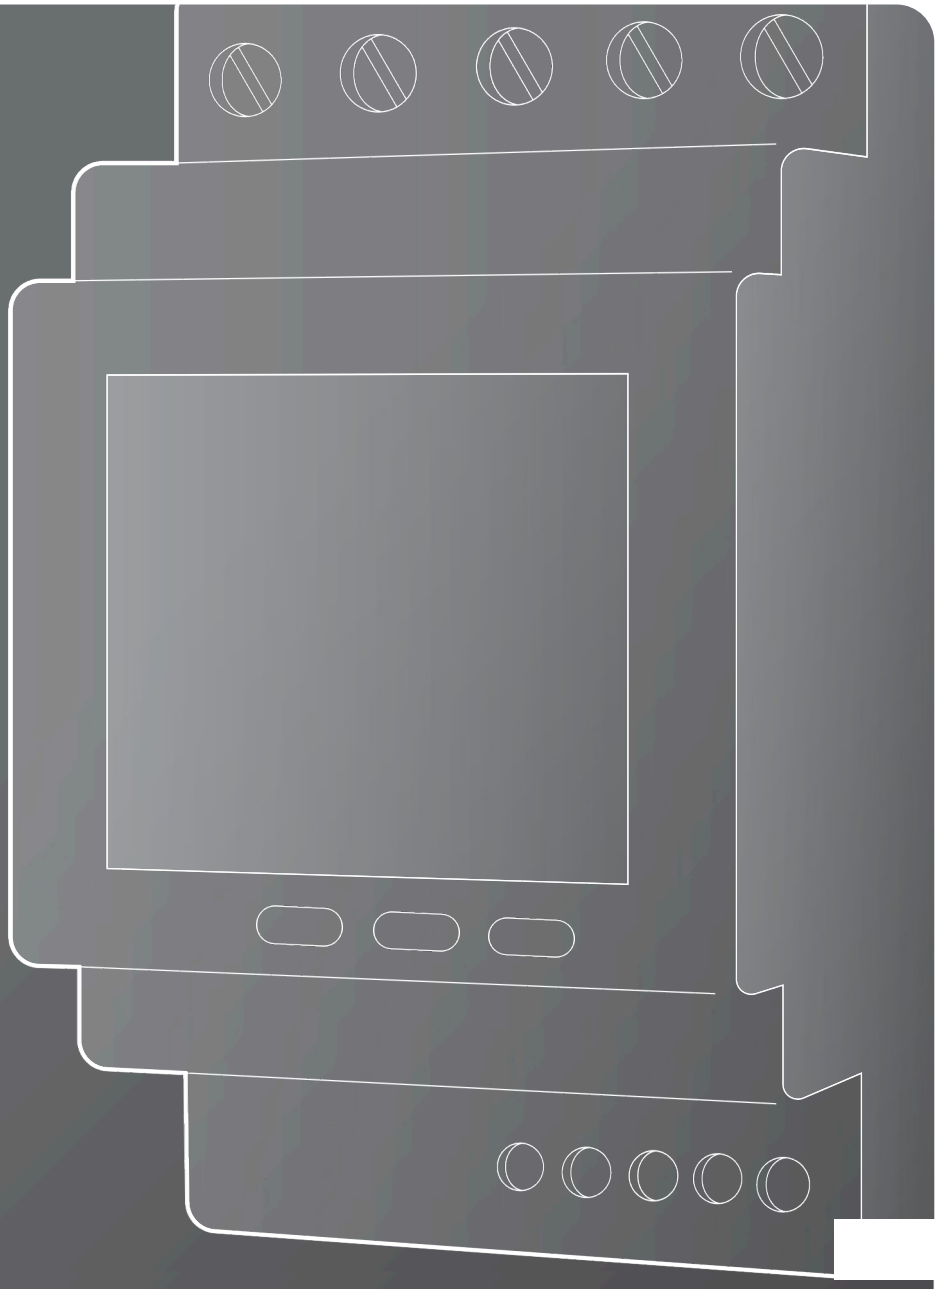

3+ channel relays

TYPICALLY USED FOR


Load shedding

Lights

Appliances

Valves

Heating & Cooling

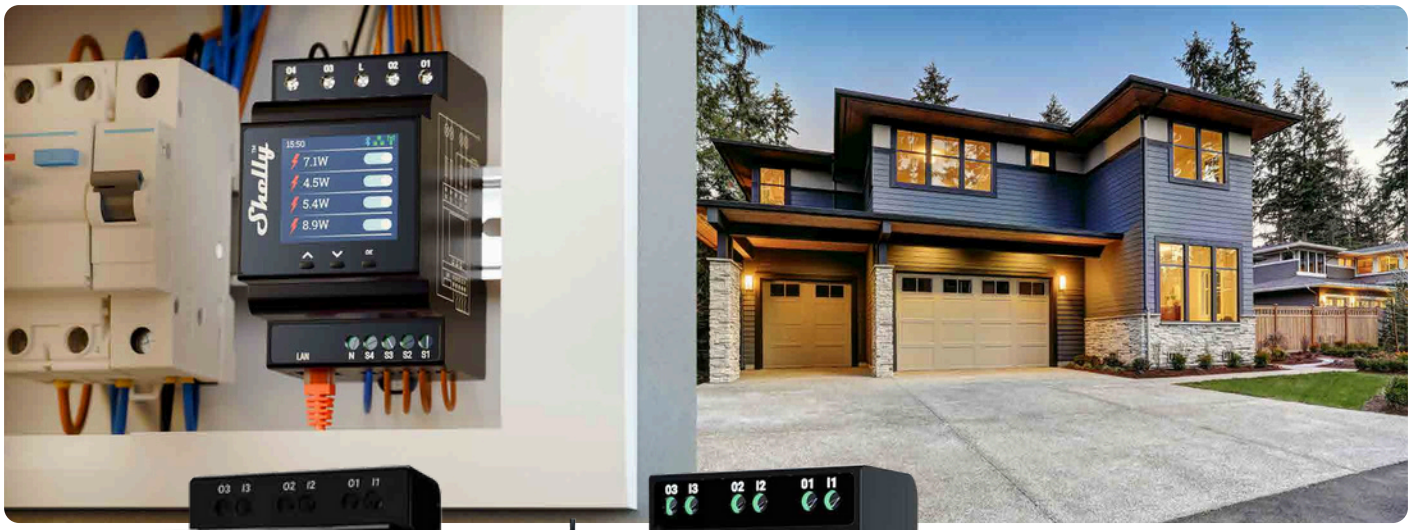

GLOBAL



Shelly
Pro 3

Power supply **110-240 V~**

Max load **16 A per channel, 48 A total**

Connectivity **Wi-Fi 4**
Bluetooth 4.2
LAN

CPU **ESP32-D0WDQ6**

Flash Memory **8 MB**

Size (HxWxD) **96x53x59 mm / 3.78x2.01x2.32 inch**

Weight **150 g / 5.29 oz**

Certifications **RED, LVD, EMC, ROHS, RCM**

more info

EU
US
ANZ



Shelly
Wave Pro 3

Power supply **110-240 V~**

Max load **16 A per channel, 48 A total**

Connectivity **ZWLR**
EU: 864 MHz
US: 912 MHz
Z-Wave Plus
EU: 868.4 MHz
US: 908.4 MHz
ANZ: 919.8 MHz

CPU **Z-Wave® S800**

Size (HxWxD) **96x53x59 mm / 3.78x2.01x2.32 inch**

Weight **150 g / 5.29 oz**

Certifications **RED, LVD, EMC, ROHS, RCM, FCC, SA**

more info



GLOBAL



Shelly
Pro 4PM

Power supply	**110-240 V~**
Max load	**16 A per channel, 40 A total**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2** **LAN**
CPU	**ESP32-D0WDQ6**
Flash Memory	**8 MB**
Size (HxWxD)	**96x53x59 mm / 3.78x2.01x2.32 inch**
Weight	**150 g / 5.29 oz**
Certifications	**RED, LVD, EMC, ROHS, RCM**

more info

GLOBAL



Shelly
Pro Dual Cover/ Shutter PM

Power supply	**110-240 V~**
Max load	**16 A per channel, 32 A total**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2** **LAN**
CPU	**ESP32-D0WDQ6**
Flash Memory	**8 MB**
Size (HxWxD)	**96x53x59 mm / 3.78x2.01x2.32 inch**
Weight	**150 g / 5.29 oz**
Certifications	**RED, LVD, EMC, ROHS**

more info

TYPICALLY USED FOR

Energy monitoring

Energy saving

Electric chargers

Photo voltaic

Energy meters





GLOBAL



Shelly
EM Gen3

Power supply	**110-240 V~**
Max load	**2 A (240 V~)**
Internal data storage	**Up to 10 days of 1 min data records**
Relay Inside	**Yes**
Connectivity	**Wi-Fi 4 Bluetooth 4.2**
CPU	**ESP-Shelly-C38F**
Flash Memory	**8 MB**
Size (HxWxD)	**37x42x16 mm / 1.46x1.65x0.63 inch**
Weight	**EM Gen3 - 23 g / 0.81 oz**
Certifications	**RED, LVD, EMC, ROHS**

more info

EU



Shelly
3EM-63T Gen3

Power supply	**220-240 V~**
Ammeters	**0 - 63 A (130 A saturation)**
Internal data storage	**Up to 7 days**
Relay Inside	**No**
Connectivity	**Wi-Fi 4 Bluetooth 4.2**
CPU	**ESP-Shelly-C38F**
Flash Memory	**8 MB**
Size (HxWxD)	**31x54x42 mm / 1.22x2.13x1.65 in**
Weight	**52 g / 1.83 oz**
Certifications	**RED, LVD, EMC, ROHS**

more info

EU



Shelly
3EM-63W Gen3

Power supply	**220-240 V~**
Ammeters	**0 - 63 A (130 A saturation)**
Internal data storage	**Up to 7 days**
Relay Inside	**No**
Connectivity	**Wi-Fi 4 Bluetooth 4.2**
CPU	**ESP-Shelly-C38F**
Flash Memory	**8 MB**
Size (HxWxD)	**21x54x42 mm / 0.83x2.13x1.65 inch**
Weight	**58 g / 2.05 oz**
Certifications	**RED, LVD, EMC, ROHS**

more info



GLOBAL



Shelly
PM Mini Gen3

Power supply	**110-240 V~**
Max load	**16 A (240 V~)**
Relay Inside	**No**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2**
CPU	**ESP-Shelly-C38F**
Flash Memory	**8 MB**
Size (HxWxD)	**29x34x16 mm /** **1.34x1.11x0.63 inch**
Weight	**19 g / 0.65 oz**
Certifications	**RED, LVD, EMC, ROHS**

more info

GLOBAL



Shelly
EM Mini Gen4

Power supply	**110-240 V~**
Max load	**16 A (240 V~)**
Relay Inside	**No**
Connectivity	**Wi-Fi 6** **Bluetooth 5** **Zigbee 802.15.4**
CPU	**ESP-Shelly-C68F**
Flash Memory	**8 MB**
Size (HxWxD)	**29x34x16 mm /** **1.34x1.11x0.63 inch**
Weight	**19 g / 0.65 oz**
Certifications	**RED, LVD, EMC, ROHS**

more info

EU
US
ANZ



Shelly
Wave PM Mini

Power supply	**110-240 V~**
Max load	**16 A (240 V~)**
Relay Inside	**No**
Connectivity	**ZWLR** **US: 912 MHz**
CPU	**Z-Wave Plus** **EU: 868.4 MHz** **US: 908.4 MHz** **ANZ: 919.8 MHz** **Z-Wave® S800**
Size (HxWxD)	**29x34x16 mm /** **1.34x1.11x0.63 inch**
Weight	**19 g / 0.65 oz**
Certifications	**RED, LVD, EMC, ROHS, FCC,** **SA**

more info





GLOBAL

Shelly
Pro EM-50

Power supply	**100 - 260 V~**
Ammeters (RMS via CT)	**0 - 50 A**
Relay Inside	**Yes**
Connectivity	**Wi-Fi 4 Bluetooth 4.2 LAN**
CPU	**ESP32-D0WDQ6**
Flash Memory	**16 MB**
Size (HxWxD)	**94x19x69 mm / 3.70x0.75x2.71 in**
Weight	**63 g / 2.22 oz**
Certifications	**RED, LVD, EMC, ROHS, RCM**

more info



GLOBAL

Shelly
Pro 3EM-120

Power supply	**100 - 260 V~**
Ammeters (RMS via CT)	**0 - 120 A**
Relay Inside	**No**
Connectivity	**Wi-Fi 4 Bluetooth 4.2 LAN**
CPU	**ESP32-D0WDQ6**
Flash Memory	**16 MB**
Size (HxWxD)	**94x19x69 mm / 3.70x0.75x2.71 in**
Weight	**62 g / 2.19 oz**
Certifications	**RED, LVD, EMC, ROHS, RCM**

more info



GLOBAL

Shelly
Pro 3EM-400

Power supply	**100 - 260 V~**
Ammeters (RMS via CT)	**0 - 400 A**
Relay Inside	**No**
Connectivity	**Wi-Fi 4 Bluetooth 4.2 LAN**
CPU	**ESP32-D0WDQ6**
Flash Memory	**16 MB**
Size (HxWxD)	**94x19x69 mm / 3.70x0.75x2.71 in**
Weight	**62 g / 2.19 oz**
Certifications	**RED, LVD, EMC, ROHS, RCM**

more info



GLOBAL



Shelly
Pro 3EM 3CT 63

Power supply	**100 - 260 V~**
Ammeters (RMS via CT)	**0 - 63 A**
Relay Inside	**No**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2** **LAN**
CPU	**ESP32-D0WDQ6**
Flash Memory	**16 MB**
Size (HxWxD)	**94x19x69 mm / 3.70x0.75x2.71 in**
Weight	**62 g / 2.19 oz**
Certifications	**RED, LVD, EMC, ROHS, RCM**

more info


GLOBAL



Shelly
Pro 3EM Switch Add-on

Power supply	**3.3 V⎓ and 12 V⎓ (from Shelly Pro 3EM device)**
Ammeters	**-**
Relay Inside	**Yes**
Max switching voltage	**240 V~/30 V⎓**
Max switching current	**2 A**
Flash Memory	**-**
Size (HxWxD)	**94x19x69 mm / 3.70x0.75x2.71 in**
Weight	**20 g / 0.70 oz**
Certifications	**LVD, EMC, ROHS, RCM**

more info

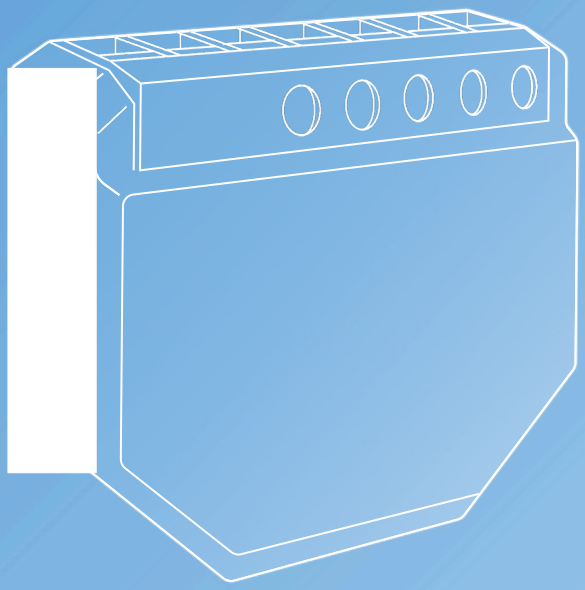

Lighting control
for no neutral installations

TYPICALLY USED FOR

Lights

No neutral Instalation

LIGHTING CONTROL FOR NO NEUTRAL INSTALLATIONS



EU



Shelly
1L Gen3

Power supply	**220-240 V~ 50Hz (Shelly Bypass is required)**
Max. switching power	**200W**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2**
CPU	**ESP-Shelly-C38F**
Flash Memory	**8 MB**
Size (HxWxD)	**37x42x16 mm / 1.46x1.65x0.63 inch**
Weight	**24 g / 0.85 oz**
Certifications	**RED, LVD, EMC, ROHS**

more info

EU




Shelly
2L Gen3

Power supply	**220-240 V~ 50Hz (Shelly Bypass is required)**
Max. switching power	**200W through O1** **700W through O2**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2**
CPU	**ESP-Shelly-C38F**
Flash Memory	**8 MB**
Size (HxWxD)	**37x42x16 mm / 1.46x1.65x0.63 inch**
Weight	**24 g / 0.85 oz**
Certifications	**RED, LVD, EMC, ROHS**

more info

Dimmers

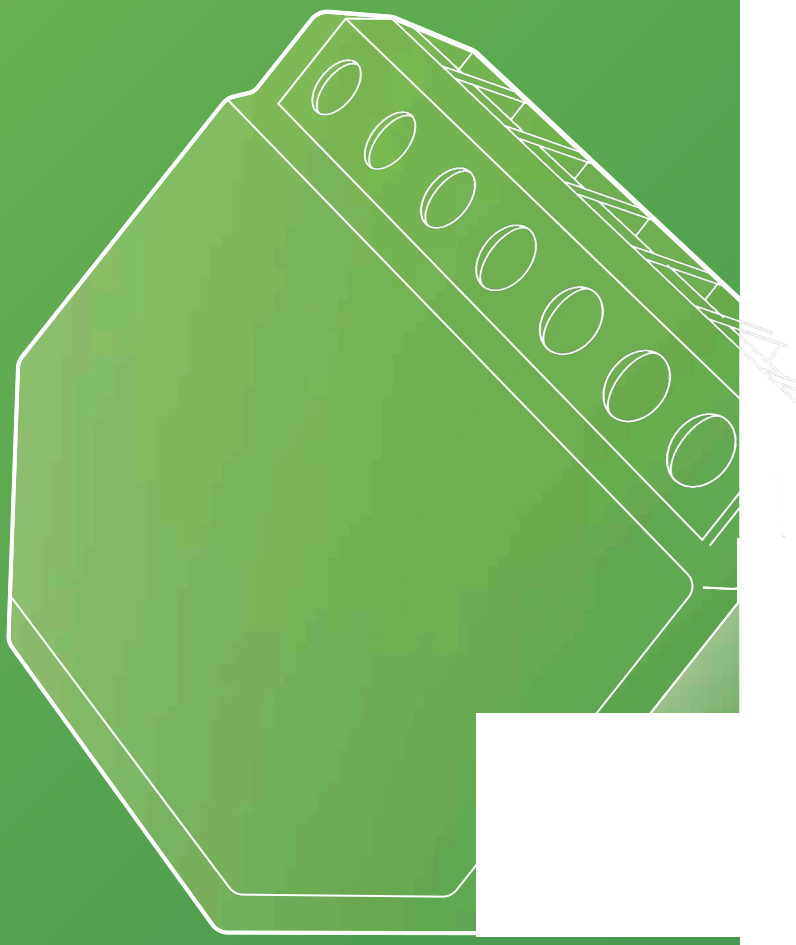

TYPICALLY USED FOR

LED strips

Lights

Dimming



GLOBAL



Shelly
DALI Dimmer Gen3

Power supply	**110-240 V~**
Max load	**Bus power supply guaranteed 10mA (up to 5 DALI control gear units), Short circuit current < 35 mA**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2**
CPU	**ESP32-C3 Shelly**
Flash Memory	**8 MB**
Size (HxWxD)	**38x42.5x16.5 mm / 1.50x1.67x0.65 inch**
Weight	**18 g / 0.63 oz**
Certifications	**RED, LVD, EMC, ROHS, RCM, DALI-2**

more info

EU
ANZ



Shelly
Dimmer Gen3

Compatible with **no neutral installation**

Power supply	**220-240 V~, 50 Hz (Shelly Bypass is required)**
Ammeter range (AC)	**0 A - 3 A, ± 5 % (when used with neutral)**
Dimming type	**Trailing edge**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2**
CPU	**ESP32 C3 / STM32 G051**
Flash Memory	**8 MB**
Size (HxWxD)	**38x42.5x16.5 mm / 1.50x1.67x0.65 inch**
Weight	**24.3 g / 0.86 oz**
Certifications	**RED, LVD, EMC, ROHS, RCM**

more info

EU




Shelly
Dimmer Gen4

Compatible with **no neutral installation**

Power supply	**220-240 V~, 50 Hz (Shelly Bypass is required)**
Ammeter range (AC)	**0 A - 3 A, ± 5 % (when used with neutral)**
Dimming type	**Trailing edge**
Connectivity	**Wi-Fi 6** **Bluetooth 5** **Zigbee 802.15.4**
CPU	**ESP-Shelly-C68F** **STM32 G051**
Flash Memory	**8 MB**
Size (HxWxD)	**38.5x43.5x17mm / 1.52x1.71x0.67in**
Weight	**24.3 g / 0.86 oz**
Certifications	**RED, LVD, EMC, ROHS, SAA**

more info

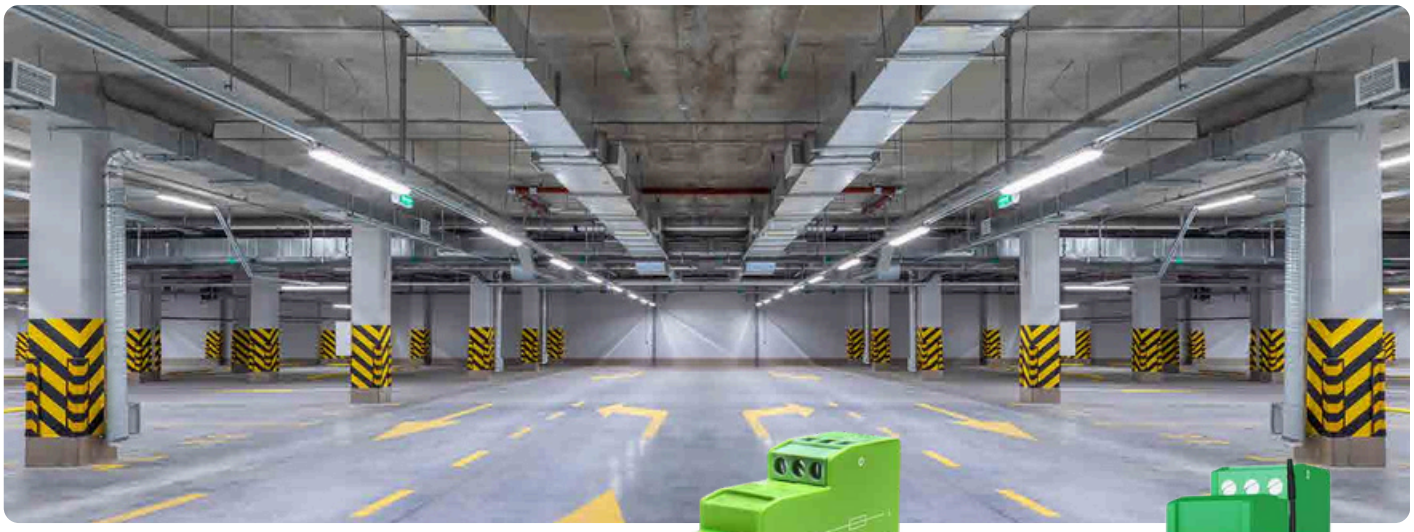

EU



Shelly
Wave Dimmer

Power supply **220-240 V ~, 50 Hz**

Max load **200 W**

Connectivity **ZWLR**
EU: 864 MHz
Z-Wave Plus
EU: 868.4 MHz

CPU **Z-Wave® S800**

Size (HxWxD) **37x42x16 ±0.5 mm / 1.46x1.65x0.63 ±0.02 in**

Weight **25 g / 0.88 oz.**

Certifications **RED, LVD, EMC, ROHS, RCM, FCC, SA**

more info

GLOBAL



Shelly
Pro Dimmer 1PM

Power supply **110-240 V~**

Max load **200 W**

Connectivity **Wi-Fi 4**
Bluetooth 4.2
LAN

CPU **ESP32-D0WDQ6**

Flash Memory **8 MB**

Size (HxWxD) **94x19x69 mm / 3.70x0.75x2.71 in**

Weight **75 g / 2.7 oz**

Certifications **LVD, RED, EMC, ROHS, RCM**

more info

EU
US
ANZ



Shelly
Wave PRO Dimmer 1PM

Power supply **110-240 V~**

Max load **200 W**

Connectivity **Z-Wave Plus**
EU: 868.4 MHz
US: 908.4 MHz
ANZ: 919.8 MHz

CPU **Z-Wave® S800**


Flash Memory **512 kB**

Size (HxWxD) **94x19x69 mm / 3.70x0.75x2.71 in**

Weight **75 g / 2.7 oz**

Certifications **LVD, RED, EMC, ROHS, FCC, SA**

more info

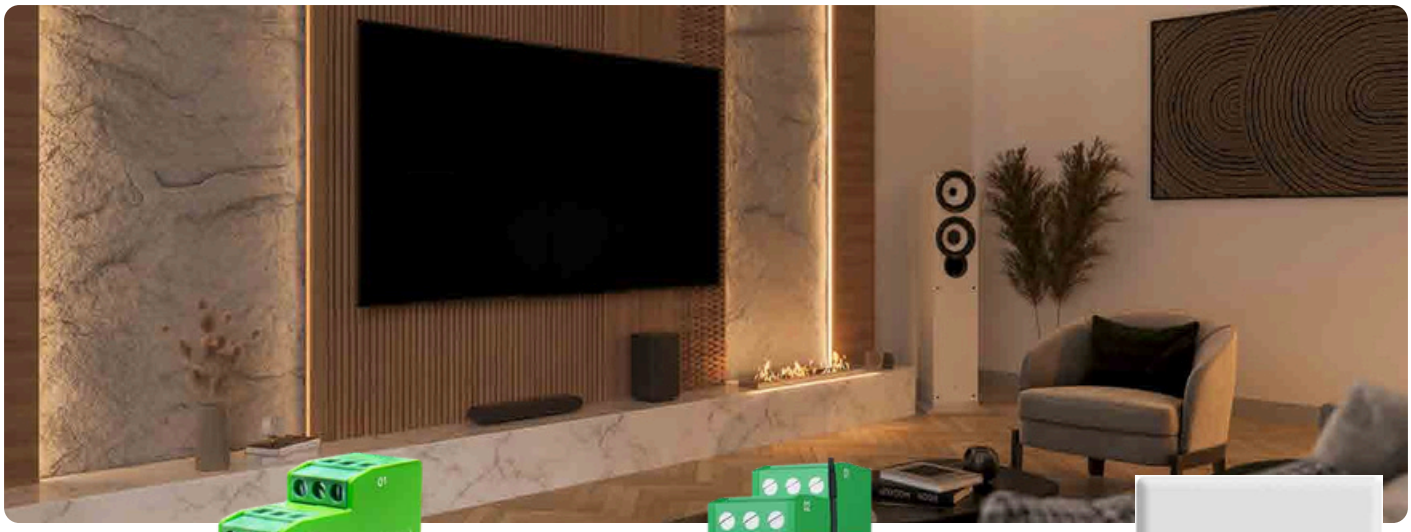

GLOBAL



Shelly

Pro Dimmer 2PM

Power supply	**110-240 V~**
Max load	**200 W per channel**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2** **LAN**
CPU	**ESP32-D0WDQ6**
Flash Memory	**8 MB**
Size (HxWxD)	**94x19x69 mm / 3.70x0.75x2.71 in**
Weight	**75 g / 2.7 oz**
Certifications	**LVD, RED, EMC, ROHS, RCM**

more info

EU
US
ANZ



Shelly

Wave PRO Dimmer 2PM

Power supply	**110-240 V~**
Max load	**200 W per channel**
Connectivity	**Z-Wave Plus** **EU: 868.4 MHz** **US: 908.4 MHz** **ANZ: 919.8 MHz**
CPU	**Z-Wave® S800**
Flash Memory	**512 kB**
Size (HxWxD)	**94x19x69 mm / 3.70x0.75x2.71 in**
Weight	**75 g / 2.7 oz**
Certifications	**RED, LVD, EMC, ROHS, RCM, FCC, SA**

more info

US




Shelly

Plus Wall Dimmer

Power supply	**100 - 120 V**
Max load	**400 W (incandescent)** **150 W (dimmable only LED and CFL)**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2**
CPU	**ESP32**
Flash Memory	**4 MB**
Size (HxWxD)	**120x70x39 mm / 4.72 x 2.76 x 1.50 in**
Weight	**121 g / 4.28 oz**
Certifications	**LVD, RED, EMC, ROHS**

more info

0/1-10V Controllers

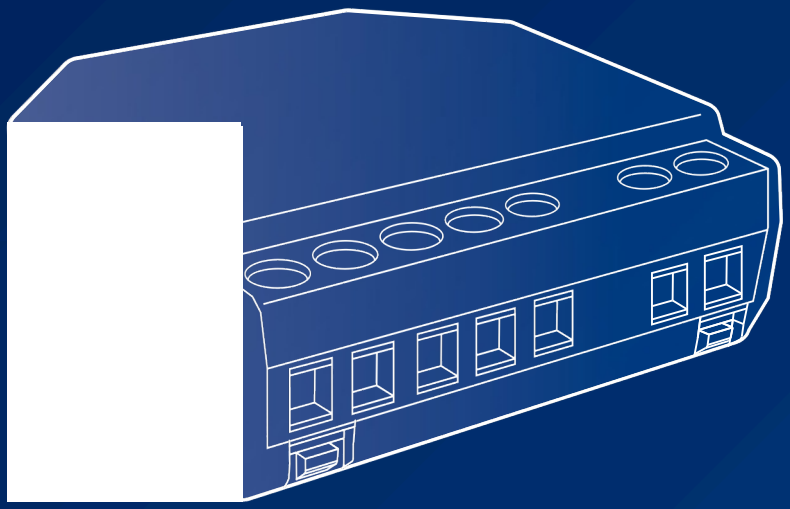


TYPICALLY USED FOR

LED strips

Lights

Dimming

Power monitoring

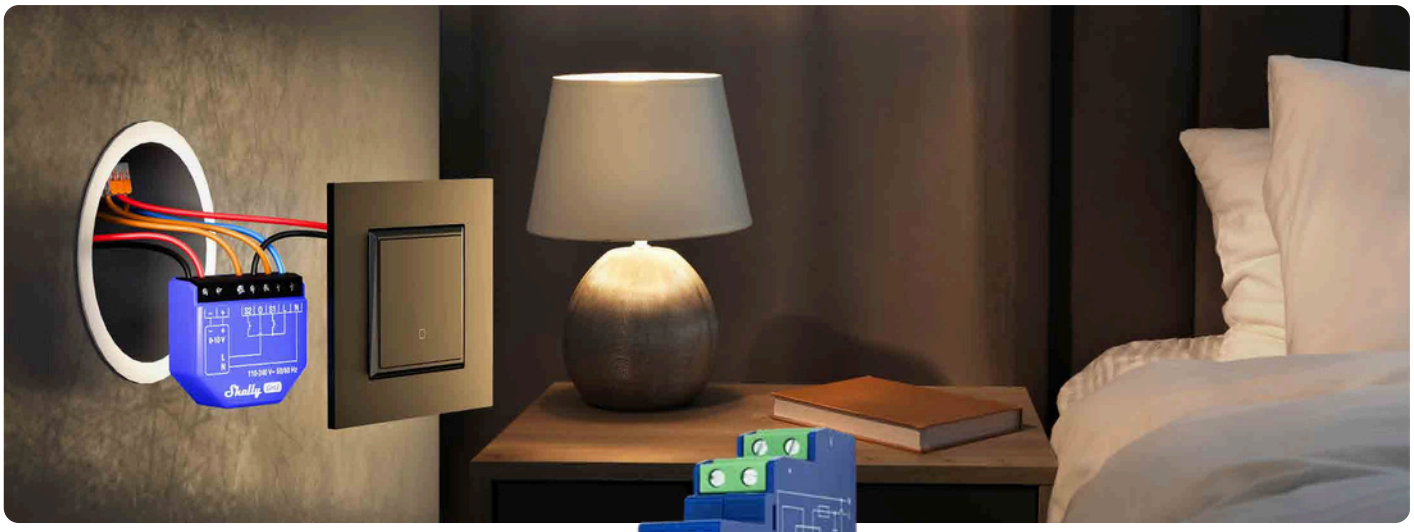

GLOBAL



Shelly

Dimmer 0/1-10V PM Gen3

Power supply	**110-240 V~**
Max load	**13 A (240 V~)**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2**
CPU	**Shelly ESP32 C3**
Flash Memory	**8 MB**
Size (HxWxD)	**38.5x43.5x17mm / 1.52x1.71x0.67in**
Weight	**28.5 g / 0.99 oz**
Certifications	**RED, LVD, EMC, ROHS, RCM**

more info

GLOBAL




Shelly

Pro Dimmer 0/1-10V PM

Power supply	**110-240 V~**
Max load	**16 A (240 V~)**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2** **LAN**
CPU	**ESP32-D0WDQ6**
Flash Memory	**8 MB**
Size (HxWxD)	**94x19x69 mm / 3.70x0.75x2.71 in**
Weight	**70 g / 2.5 oz**
Certifications	**RED, LVD, EMC, ROHS, RCM**

more info

RGBW/ RGBWW Controllers

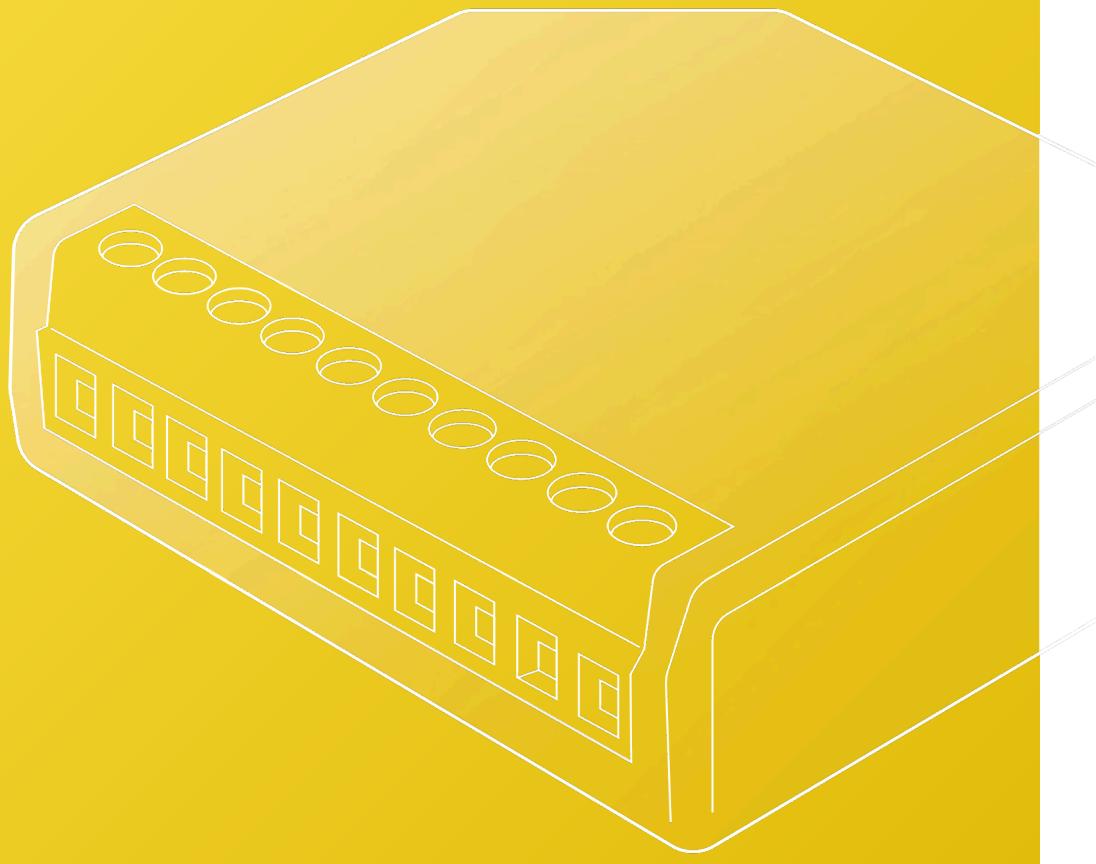

TYPICALLY USED FOR

LED strips

Lights

Dimming

Colour

Power monitoring



GLOBAL



Shelly
Plus RGBW PM

Power supply	**12-24 V⎓**
Max load	**4 A per channel (10 A total)**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2**
CPU	**ESP-Shelly-C38F**
Flash Memory	**4 MB**
Size (HxWxD)	**42x37x12 mm /** **1.65x1.46x0.66 inch**
Weight	**17 g / 0.60 oz**
Certifications	**RED, EMC, ROHS, RCM**

more info

GLOBAL



Shelly
PRO RGBWW PM

Power supply	**12-24 V⎓**
Max load	**6 A per channel (16 A total)**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2** **LAN**
CPU	**ESP32-D0WDQ6**
Flash Memory	**8 MB**
Size (HxWxD)	**94x19x69 mm /** **3.70x0.75x2.71 inch**
Weight	**61 g / 2.15 oz**
Certifications	**RED, EMC, ROHS**

more info

TYPICALLY USED FOR


Lights

OFF ON

Appliances

Scene activation

Input Controllers

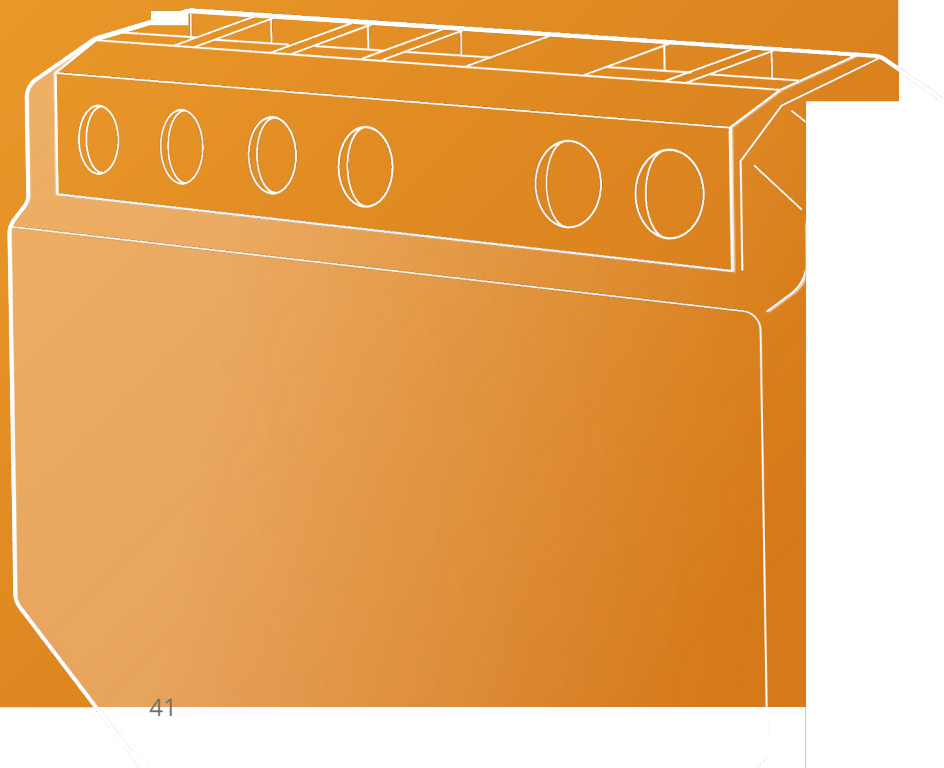



GLOBAL



Shelly
Plus i4

Power supply	**110-240 V~**
Max load	**-**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2**
CPU	**ESP32-U4WDH**
Flash Memory	**4 MB**
Size (HxWxD)	**37x42x16 mm /** **1.46x1.65x0.63 in**
Weight	**18 g / 0.63 oz**
Certifications	**LVD, RED, EMC, ROHS, RCM**

more info

GLOBAL



Shelly
i4 Gen3

Power supply	**110-240 V~**
Max load	**-**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2**
CPU	**ESP-Shelly-C38F**
Flash Memory	**8 MB**
Size (HxWxD)	**37x42x16 mm/** **1.46x1.65x0.63 in**
Weight	**19 g / 0.67 oz**
Certifications	**LVD, RED, EMC, ROHS, RCM**

more info


EU
US
ANZ



Shelly
Wave i4

Power supply	**110-240 V~**
Max load	**-**
Connectivity	**ZWLR** **EU: 864 MHz** **US: 912 MHz** **Z-Wave Plus** **EU: 868.4 MHz** **US: 908.4 MHz** **ANZ: 919.8 MHz**
CPU	**Z-Wave® S800**
Size (HxWxD)	**37x42x16 mm /** **1.46x1.65x0.63 in**
Weight	**17 g / 0.6 oz**
Certifications	**RED, LVD, EMC, ROHS, FCC, SA**

more info

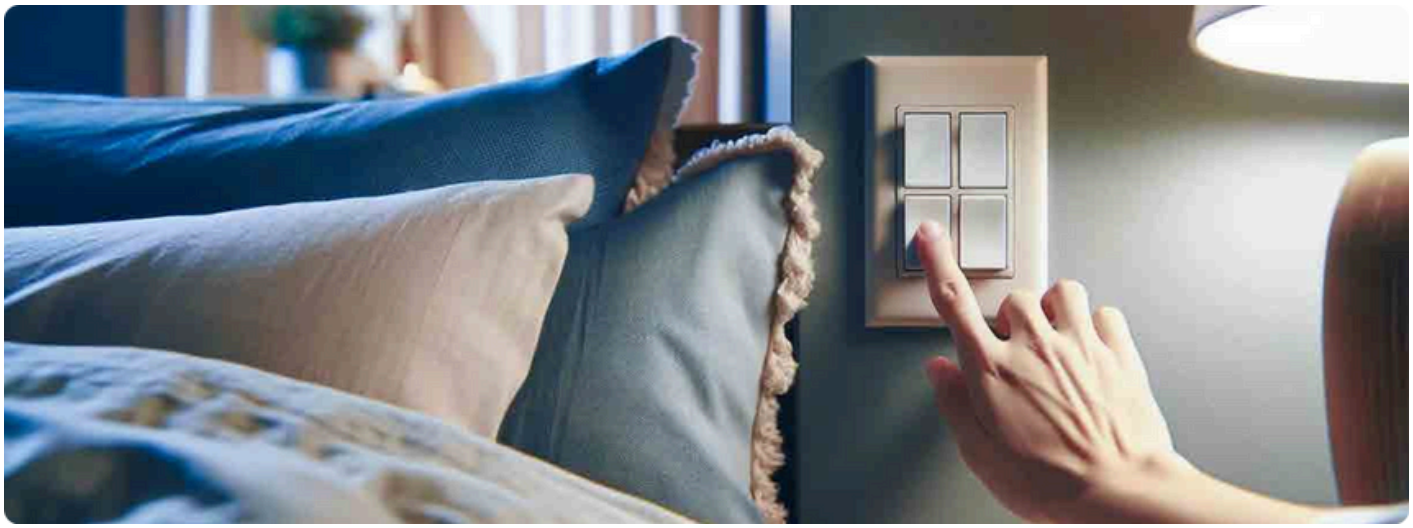

GLOBAL



Shelly
Plus i4 DC

Power supply	**5-24 V⎓**
Max load	**-**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2**
CPU	**ESP32-U4WDH**
Flash Memory	**4 MB**
Size (HxWxD)	**37x42x16 mm /** **1.46x1.65x0.63 in**
Weight	**17 g / 0.6 oz**
Certifications	**LVD, RED, EMC, ROHS**

more info


EU
US
ANZ



Shelly
Wave i4 DC

Power supply	**5-24 V⎓**
Max load	**-**
Connectivity	**ZWLR** **EU: 864 MHz** **US: 912 MHz** **Z-Wave Plus** **EU: 868.4 MHz** **US: 908.4 MHz** **ANZ: 919.8 MHz**
CPU	**Z-Wave® S800**
Size (HxWxD)	**37x42x16 mm/** **1.46x1.65x0.63 in**
Weight	**17 g / 0.6 oz**
Certifications	**LVD, RED, EMC, ROHS, FCC, SA**

more info

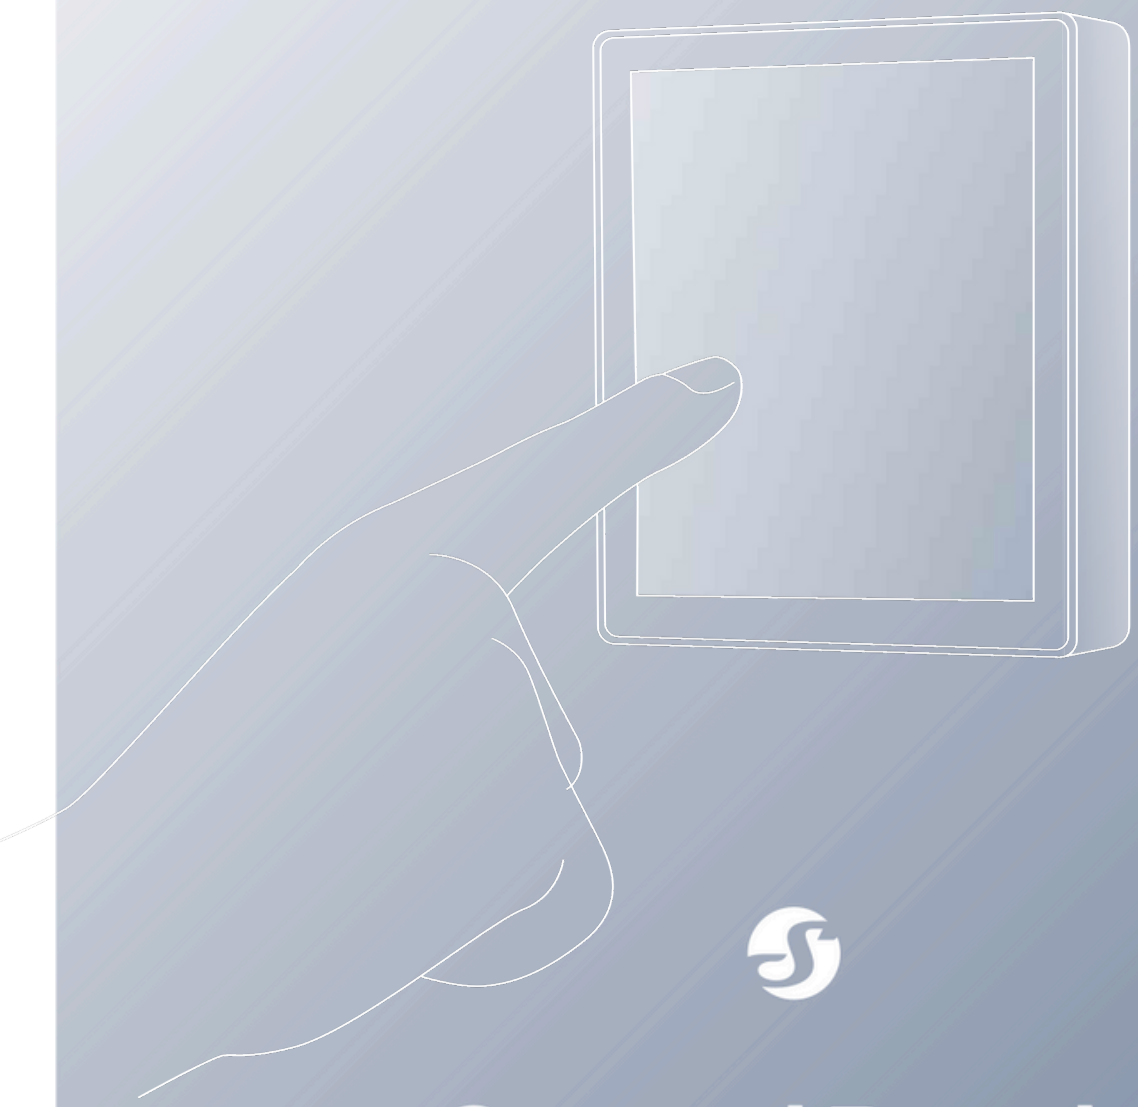

Control Panels

TYPICALLY USED FOR

Room management

Centralized control

Thermostat



EU
ANZ



Shelly
Wall Display

Power supply	**230 V~**
Max load	**5 A**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2**
CPU	**MTK6580**
Flash Memory	**4 GB**
Size (HxWxD)	**85x85x30 mm /** **3.35x3.35x1.18 inch**
Weight	**180 g / 6.35 oz**
Display	**4 inch color display**
Certifications	**RED, LVD, EMC, ROHS, RCM**

more info

EU



Shelly
Wall Display x2

Power supply	**230 V~ / USB Type-C** **power supply 5 V⎓**
Max load	**5 A**
Connectivity	**Wi-Fi 4** **Bluetooth 5**
CPU	**SC7731E, Quad Core A7** **1.3 GHz**
Flash Memory	**4 GB**
Size (HxWxD)	**87x178x33 mm /** **3.43x7x1.3 inch**
Weight	**256 g / 9.03 oz**
Display	**6.95 inch color display**
Certifications	**RED, LVD, EMC, ROHS**

more info

EU



Shelly
Wall Display XL

Power supply	**100 - 240 V~ 50/60Hz /** **USB Type-C power supply** **5 V⎓ / 3 A**
Max load	**5 A**
Connectivity	**Wi-Fi 6 Dual Band** **(2,4 GHz & 5 GHz)** **Bluetooth 5.4**
CPU	**Rockchip RK3566 Quad** **core Cortex-A55**
Flash Memory	**16 GB**
Size (HxWxD)	**155,8x272,5x38,3 mm /** **6.13x10.7x1.50 inch**
Weight	**920 g / 32.45 oz**
Display	**10.1 inch 5-point capacity** **color display**
Certifications	**RED, LVD, EMC, ROHS**

more info

Plug&Play



TYPICALLY USED FOR

OFF ON
Appliances

Heating & Cooling

Lights

Energy saving

Power monitoring



EU



Shelly
Plug S MTR Gen3

Power supply	**220 - 230 V~**
Max load	**12 A**
Socket type	**Type F / Schuko**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2**
CPU	**ESP-Shelly-C38F**
Flash Memory	**8 MB**
Size (HxWxD)	**44x44x70 mm / 1.73x1.73x2.75 in**
Weight	**60 g / 2.08 oz**
Certifications	**LVD, RED, EMC, ROHS**

more info

EU



Shelly
Wave Plug S

Power supply	**220 - 230 V~**
Max load	**12 A**
Socket type	**Type F / Schuko**
Connectivity	**ZWLR** **EU: 864 MHz** **Z-Wave Plus** **EU: 868.4 MHz**
CPU	**Z-Wave® S800**
Flash Memory	**512 kB**
Size (HxWxD)	**44x44x70 mm / 1.73x1.73x2.75 in**
Weight	**60 g / 2.08 oz**
Certifications	**LVD, RED, EMC, ROHS**

more info

EU




Shelly
Plug PM Gen3

No relay inside

Power supply	**230 V~**
Max load	**16 A**
Socket type	**Type F / Schuko**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2**
CPU	**ESP-Shelly-C38F**
Flash Memory	**8 MB**
Size (HxWxD)	**44x44x70 mm / 1.73x1.73x2.75 in**
Weight	**60 g / 2.08 oz**
Certifications	**LVD, RED, EMC, ROHS**

more info

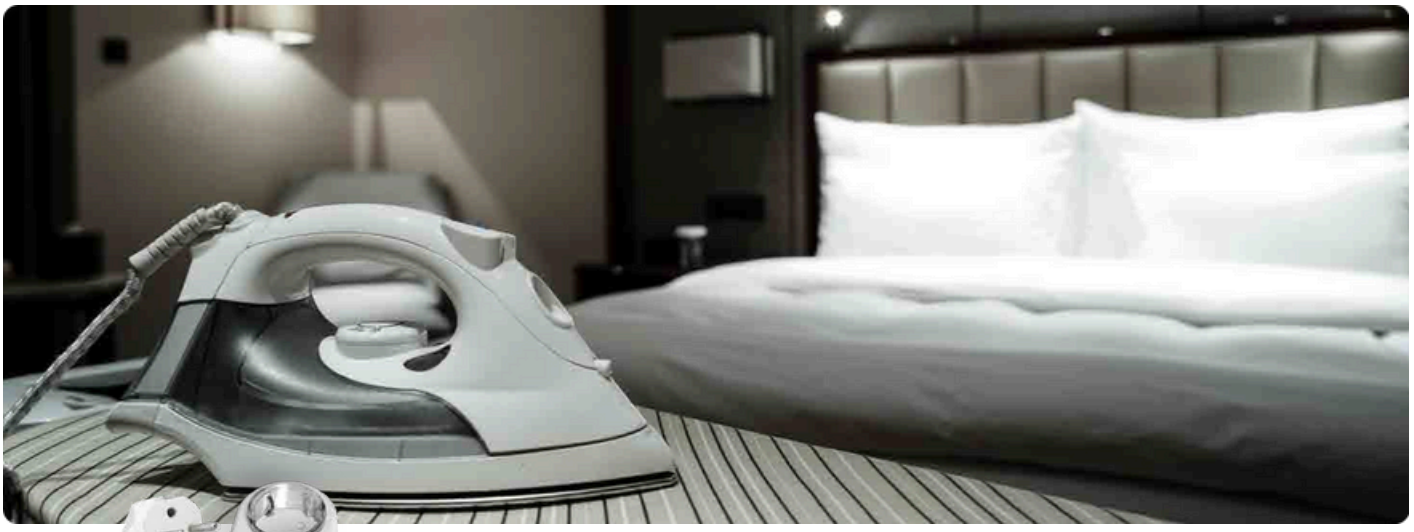

EU



Shelly
Power Strip 4 Gen4

Power supply	**220 - 240 V~ 50/60 Hz**
Max load	**16 A total / 12 A per individual socket**
Socket type	**Type F / Schuko**
Connectivity	**Wi-Fi 6 Bluetooth 5 Zigbee 802.15.4**
CPU	**ESP-Shelly-C68F**
Flash Memory	**8 MB**
Size (HxWxD)	**43x237x56 mm / 1.69x9.33x2.20 inch**
Weight	**560 g / 19.75 oz**
Certifications	**RED, LVD, EMC, ROHS**

more info

UK



Shelly
Plus Plug UK

Power supply	**230 V~**
Max load	**13 A**
Socket type	**Type G / BS 1363**
Connectivity	**Wi-Fi 4 Bluetooth 4.2**
CPU	**ESP32-U4WDH**
Flash Memory	**4 MB**
Size (HxWxD)	**60x60x56 mm / 2.36x2.36x2.20 in**
Weight	**74 g / 2.6 oz**
Certifications	**LVD, RED**

more info

UK



Shelly
Wave Plug UK

Power supply	**230 V~**
Max load	**13 A**
Socket type	**Type G / BS 1363**
Connectivity	**ZWLR EU: 864 MHz Z-Wave Plus EU: 868.4 MHz**
CPU	**Z-Wave® S800**
Flash Memory	**512 kB**
Size (HxWxD)	**60x60x56 mm / 2.36x2.36x2.20 in**
Weight	**74 g / 2.6 oz**
Certifications	**LVD, RED, EMC, ROHS**

more info



US



Shelly
Plus Plug US

Power supply	**120 V~**
Max load	**15 A**
Socket type	**Type B / NEMA 5-15**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2**
CPU	**ESP32**
Flash Memory	**4 MB**
Size (HxWxD)	**38x84x52 mm /** **1.5x3.3x2.0 in**
Weight	**70 g / 2.47 oz**
Certifications	**FCC, ETL**

more info

US



Shelly
Wave Plug US

Power supply	**120 V~**
Max load	**15 A**
Socket type	**Type B / NEMA 5-15**
Connectivity	**ZWLR** **US: 912 MHz** **Z-Wave Plus** **US: 908,4 MHz**
CPU	**Z-Wave® S800**
Flash Memory	**512 kB**
Size (HxWxD)	**38x84x52 mm /** **1.5x3.3x2.0 in**
Weight	**70 g / 2.47 oz**
Certifications	**FCC, ETL**

more info

US



Shelly
Plug US Gen4

Power supply	**120 V~**
Max load	**15 A**
Socket type	**Type B / NEMA 5-15**
Connectivity	**Wi-Fi 6** **Bluetooth 5** **Zigbee 802.15.4**
CPU	**ESP-Shelly-C68F**
Flash Memory	**8 MB**
Size (HxWxD)	**38x64x51 mm /** **1.50x2.52x2.01 inch**
Weight	**64 g / 2.25 oz**
Certifications	**FCC, UL**

more info



EU



Shelly
Outdoor Plug S Gen3

Power supply	**230 V~**
Max load	**12 A**
Socket type	**Type F / Schuko**
Connectivity	**Wi-Fi 4** **Bluetooth 4.2**
CPU	**ESP-Shelly-C38F**
Flash Memory	**8 MB**
Size (HxWxD)	**56x56x103 mm / 2.21x2.21x4.55 in**
Weight	**85 g / 3 oz**
Certifications	**RED, LVD, EMC, ROHS**

more info


EU



Shelly
Wave Outdoor Plug S

Power supply	**230 V~**
Max load	**12 A**
Socket type	**Type F / Schuko**
Connectivity	**ZWLR** **EU: 864 MHz** **Z-Wave Plus** **EU: 868.4 MHz**
CPU	**Z-Wave® S800**
Flash Memory	**512 kB**
Size (HxWxD)	**56x56x103 ±0.5 mm / 2.21x2.21x4.55 ±0.02 in**
Weight	**85 ±1 g / 3 ±0.04 oz**
Certifications	**RED, LVD, EMC, ROHS**

more info

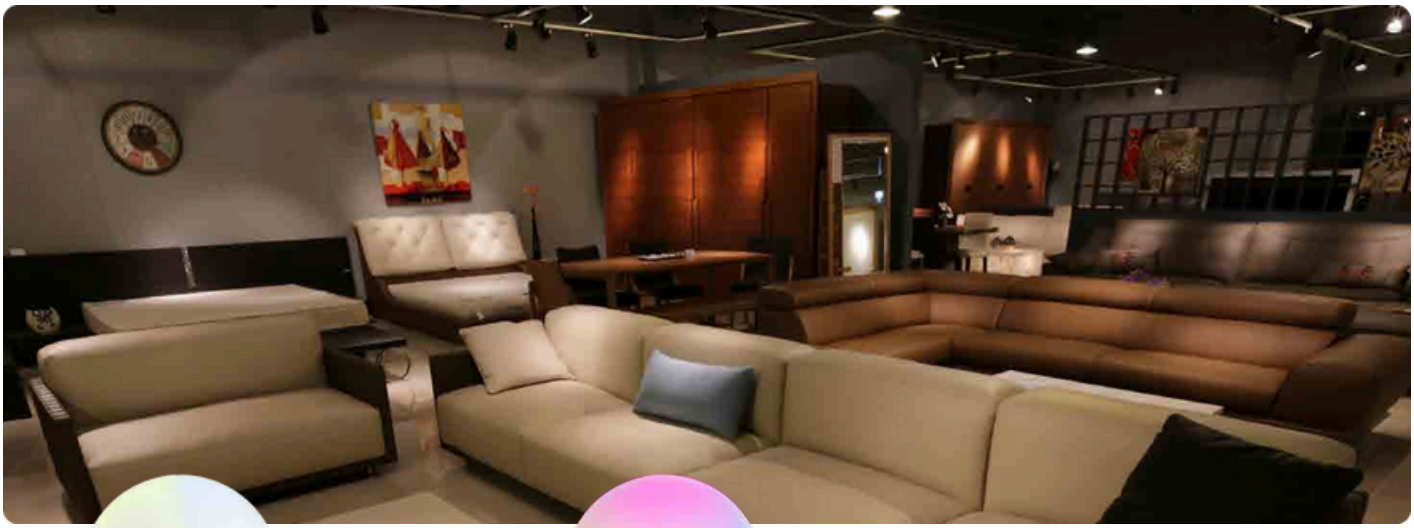

EU



Shelly
DUO E27/GU10

	E27	GU10
Power supply	100-240 V~	
Power rating	9W E27 Wi-Fi 5W	
Socket type	180° 2700 K	GU10
Connectivity	6500 K	Wi-Fi 4
Beam angle		120°
Color temperature		
Brightness	Up to 800 lm	Up to 400 lm
Lifetime	30000 hours	
Size (WxH)	60x122 mm / 50x73 mm / 2.36x4.08 in	1.96x2.87 in
Certifications	RED, LVD, EMC, ROHS	

more info

EU



Shelly
DUO RGBW E27/GU10

	E27	GU10
Power supply	100-240 V~	
Power rating	9W	5W
Socket type	E27	GU10
Connectivity	Wi-Fi 4	Wi-Fi 4
Beam angle	180°	120°
Color temperature	RGB + Natural white (4000 K)	
Brightness	Up to 800 lm	Up to 400 lm
Lifetime	30000 hours	
Size (WxH)	60x122 mm / 50x73 mm / 2.36x4.08 in	1.96x2.87 in
Certifications	RED, LVD, EMC, ROHS	

more info



EU



Shelly
Vintage A60

Power supply	**230 V~**
Power rating	**7 W E27 Wi-Fi 4**
Socket type	**360° 2700 K (Warm**
Connectivity	**white)**
Beam angle	
Color temperature	
Brightness	**750 Lm**
Lifetime	**15000 hours**
Size (WxH)	**60x117 mm / 2.36x4.52 in**
Certifications	**RED, LVD, EMC, ROHS**

more info

EU




Shelly
Vintage ST64

Power supply	**230 V~**
Power rating	**7 W E27 Wi-Fi 4**
Socket type	**360° 2700 K (Warm**
Connectivity	**white)**
Beam angle	
Color temperature	
Brightness	**750 Lm**
Lifetime	**15000 hours**
Size (WxH)	**64x160 mm / 2.51x6.29 in**
Certifications	**RED, LVD, EMC, ROHS**

more info

EU

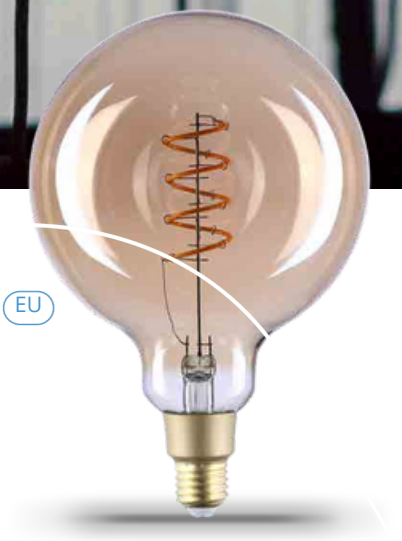

Shelly
Vintage G125

Power supply	**230 V~**
Power rating	**4 W E27 Wi-Fi 4**
Socket type	**360° 2700 K (Warm**
Connectivity	**white)**
Beam angle	
Color temperature	
Brightness	**260 Lm**
Lifetime	**15000 hours**
Size (WxH)	**125x155 mm / 4.92x6.10 in**
Certifications	**RED, LVD, EMC, ROHS**

more info



Sensors & Remote Control

TYPICALLY USED FOR

Room management

Heating & Cooling

Motion detection

Leak & Gas detection



GLOBAL



Shelly
BLU TRV

Power supply	**2x AA, 1.5 V batteries**
Battery life	**Up to 2 years (depending on usage)**
Mounting	**M30x1.5** **6 adapters included**
Connectivity	**Bluetooth 4.2**
Size (HxD):	**78 x Ø54 mm / 3.07xØ2.13 in**
Weight	**107 g / 3.77 oz**
Certifications	**LVD, RED, EMC, ROHS**

more info

GLOBAL



Shelly
H&T Gen3

Power supply	**4x AA, 1.5 V batteries**
Battery life	**Up to 1 year (depending on usage)**
Mounting	**Stand alone** **Wall mounting**
Connectivity	**W-Fi 4** **Bluetooth 4.2**
Size (HxWxD)	**70x70x26 mm / 2.76x2.76x1.02 inch (without stand)**
Weight	**47 g / 1.66 oz**
Certifications	**LVD, RED, EMC, ROHS**

more info

GLOBAL



Shelly
BLU H&T

Power supply	**1x 3 V CR2032 battery**
Battery life	**3 years**
Mounting	**On a flat surface**
Connectivity	**Bluetooth 4.2**
Size (HxWxD)	**37x37x10 mm / 1.46x1.46x0.39 in**
Weight	**13 g / 0.44 oz**
Certifications	**LVD, RED, EMC, ROHS**

more info



EU
US
ANZ



Shelly
Wave H&T

Power supply	**1x 3 V CR123A battery**
Battery life	**Up to 2 years**
Mounting	**On a flat surface**
Connectivity	**Z-Wave Plus LR** **EU: 864 MHz** **US: 912 MHz** **Z-Wave Plus** **EU: 868.4 MHz** **US: 908.4 MHz** **ANZ: 919.8 MHz**
Size (HxWxD)	**35x46 mm / 1.38x1.81 in**
Weight	**16 g without battery** **33 g with battery**
Certifications	**LVD, RED, EMC, ROHS, FCC, SA**

more info

GLOBAL



Shelly
BLU Door/Window

Power supply	**1x 3 V CR2032 battery**
Battery life	**Up to 5 years**
Mounting	**Glued to door or window**
Connectivity	**Bluetooth 4.2**
Size (HxWxD)	**35x35x7 mm/1.38x1.38x0.27 in (Sensor unit)** **35x12x7 / 1.44x0.47x0.27 in (Magnet)**
Weight	**10 g / 0.35 oz -Device** **8 g / 0.28 oz - Magnet**
Certifications	**LVD, RED, EMC, ROHS**

more info

EU
US
ANZ



Shelly
Wave Door/Window

Power supply	**1x 3 V CR2032 battery**
Battery life	**Up to 2 years**
Mounting	**Glued to door or window**
Connectivity	**Z-Wave EU: 868.4 MHz** **Z-Wave US: 908.4 MHz** **Z-Wave ANZ: 919.8 MHz**
Size (HxWxD)	**35x35x7 mm/1.38x1.38x0.27 in (Sensor unit)** **35x12x7 / 1.44x0.47x0.27 in (Magnet)**
Weight	**10 g / 0.35 oz -Device** **8 g / 0.28 oz - Magnet**
Certifications	**LVD, RED, EMC, ROHS, FCC, SA**

more info



GLOBAL



Shelly
BLU Motion

Power supply **1x 3 V CR2477 battery**

Battery life **Up to 5 years**

Mounting **Glued**

Connectivity **Bluetooth 4.2**

Size (HxWxD) **32x42x27 mm / 1.26x1.65x1.06 in**

Weight **26 g / 0.92 oz (Device with the battery)**

Certifications **LVD, RED, EMC, ROHS**

more info

EU
US
ANZ



Shelly
Wave Motion

Power supply **1x 3 V CR2477 battery**

Battery life **Up to 3 years**

Mounting **Glued**

Connectivity **Z-Wave Plus LR**
EU: 864 MHz
US: 912 MHz

Z-Wave Plus
EU: 868.4 MHz
US: 908.4 MHz
ANZ: 919.8 MHz

Size (HxWxD) **32x42x27 ±0.5 mm / 1.26x1.65x1.06 ±0.02 in)**

Weight **26 ±1 g / 0.92 ±0.05 oz (with the battery)**

Certifications **LVD, RED, EMC, ROHS, FCC, SA**

more info

GLOBAL



Shelly
GAS

Power supply **110-230 V~**

Alarm indicator **LED Flash & Sound**

Connectivity **W-Fi 4**

Size (HxWxD) **89,5x89,5x38 mm / 3.52x3.52x1.49 in**

Certifications **LVD, RED, EMC, ROHS**

more info



GLOBAL



Shelly
Flood

Power supply **1 x CR123A – 3V batteries**

Battery life **Up to 18 months**

Mounting **Stand-alone**

Connectivity **W-Fi 4**

Size (HxWxD) **70x70x19 mm / 2.75x2.75x0.74 in**

Certifications **LVD, RED, EMC, ROHS**

more info

GLOBAL



Shelly
Flood Gen4

Power supply **4 x AA - 1.5 V batteries**

Battery life **Up to 2 years**

Leak sensor cable **2 m, extendable up to 150 m**

Connectivity **Wi-Fi 6**
Bluetooth 5
Zigbee 802.15.4

CPU **ESP-Shelly-C68F**

Flash Memory **8 MB**

Size (HxWxD) **97x76x25 mm / 3.82x2.99x0.98 inch**

Weight **91 g / 3.21 oz (without batteries)**
185 g / 6.53 oz (with batteries)

Certifications **LVD, RED, EMC, ROHS**

more info

GLOBAL



Shelly
Plus Smoke

Power supply **1 x CR123A – 3V batteries**

Battery life 3 year

Connectivity **W-Fi 4**
Bluetooth 4.2

Size (HxWxD) **86x86x31mm / 3.39x3.39x1.22 in**

Certifications **LVD, RED, EMC, ROHS**

more info



EU



Shelly
BLU RC Button 4

Power supply	**1 x CR2032 – 3V batteries**
Battery life	**Up to 2 years**
Connectivity	**Bluetooth 4.2**
Size (HxWxD)	**Button: 65x30x13 mm / 2.56x1.18x0.51 in Magnetic holder (for flat surfaces): 83x44x9 mm / 3.27x1.73x0.35 in**
Weight	**21 g / 0.74 oz**
Certifications	**LVD, RED, EMC, ROHS**

more info

US




Shelly
BLU RC Button 4 US

Power supply	**1 x CR2032 – 3V batteries**
Battery life	**Up to 2 years**
Connectivity	**Bluetooth 4.2**
Size (HxWxD)	**Button: 65x30x13 mm / 2.56x1.18x0.51 in Magnetic holder (for wall switch boxes): 105x44x13 mm / 4.13x1.73x0.51 in**
Weight	**21 g / 0.74 oz**
Certifications	**LVD, RED, EMC, ROHS**

more info

GLOBAL







Shelly
BLU Button Tough1

Power supply	**1 x CR2032 – 3V batteries**
Battery life	**up to 2 years**
Connectivity	**Bluetooth 4.2**
Size (HxWxD)	**42x42x13 mm / 1.65x1.65x0.51 in**
Weight	**15 g / 0.53 oz**
Certifications	**LVD, RED, EMC, ROHS**

more info

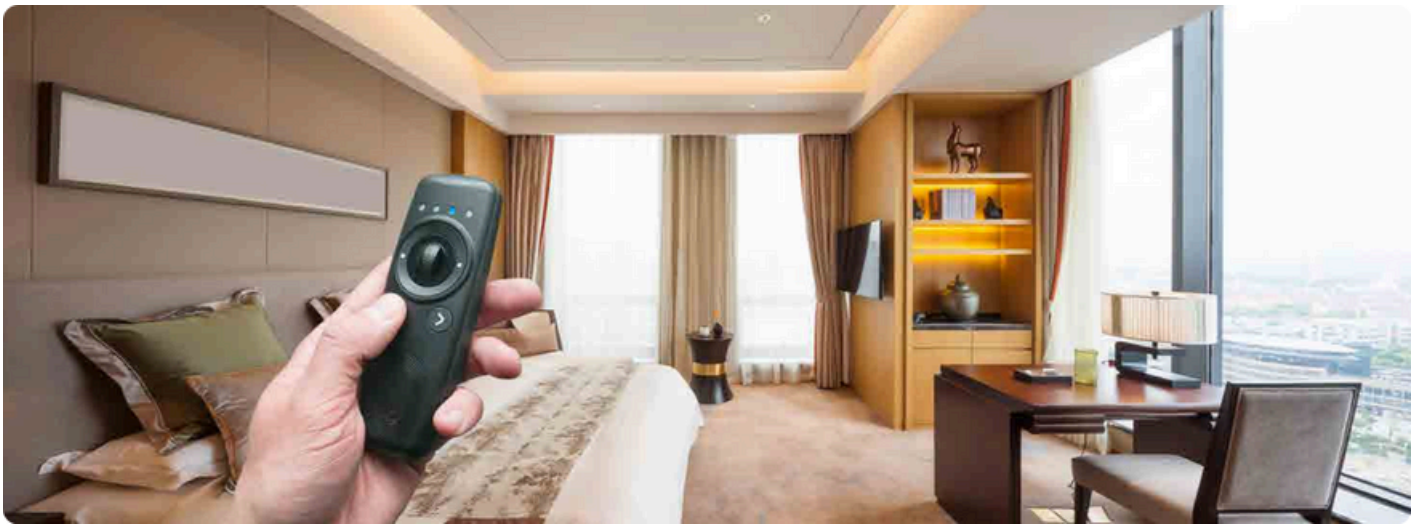

GLOBAL

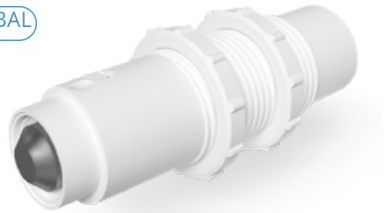

Shelly
BLU Distance

Power supply	**1 x LISOC 14505 2700mAh - 3.6 V battery**
Battery life	**up to 4 years**
Ultrasonic sensor	**200 mm - 5000 mm**
Connectivity	**Bluetooth 5**
CPU	**Silicon Labs - EFR32MG27C140F768IM32**
Flash Memory	**768 kB**
Size (HxWxD) with casing	**117.90 mm / 4.64 in x 35.30 mm / 1.39 in**
Weight	**105 g / 3.70 oz (Device with battery)**
Certifications	**LVD, RED, EMC, ROHS**

more info

GLOBAL




Shelly
BLU Remote Control ZB

Power supply	**2 x AAA - 1.5 V batteries**
Battery life	**up to 2 years**
Connectivity	**Bluetooth 5 Zigbee 802.15.4**
CPU	**EFR32MG27**
Flash Memory	**768 kB**
Size (HxWxD)	**129x47x24 mm / 5.08x1.85x0.94 inch**
Weight	**63 g / 2.22 oz (without batteries) 85 g / 3.00 oz (with batteries)**
Certifications	**LVD, RED, EMC, ROHS, FCC**

more info


GLOBAL

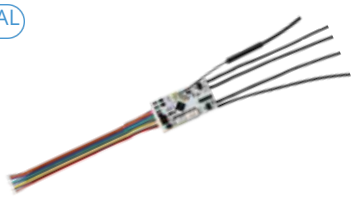

Shelly
Plus UNI

Power supply	**8-24 V~ 9-28 V⎓ 5 V⎓ (stabilized, via +5⎓V and GND)**
Max. control voltage	**30 V**
Max. control current	**300 mA**
Connectivity	**W-Fi 4 Bluetooth 4.2**
CPU	**ESP32-U4WDH**
Flash Memory	**4 MB**
Size (HxWxD)	**40x21x7 mm / 1.57x0.83x0.28 in**
Certifications	**LVD, RED, EMC, ROHS**

more info

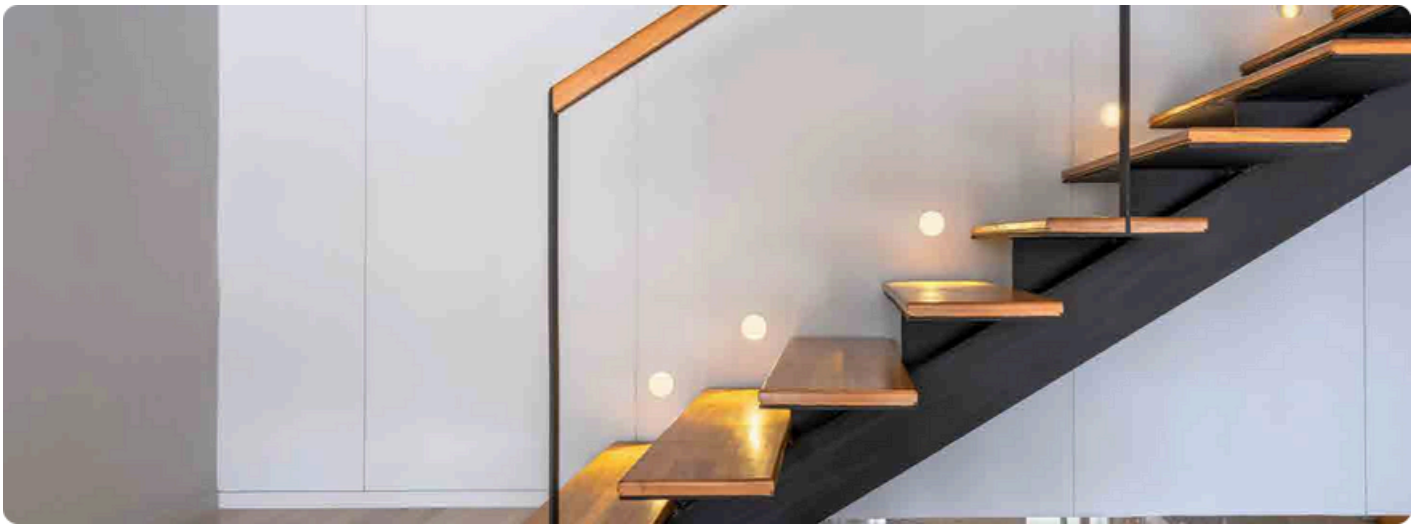

GLOBAL



Shelly
BLU Wall Switch4

Power supply **1 x CR2032 – 3V batteries**

Battery life **up to 2 years**

Connectivity **Bluetooth 4.2**

Size (HxWxD) **46x46x13 mm / 1.81x1.81x0.51 in**

Weight **17 g / 0.6 oz**

Certifications **LVD, RED, EMC, ROHS**


more info

Shelly
Adapters for BLU Wall Switch4


Gira, Merten




Busch-Jaeger

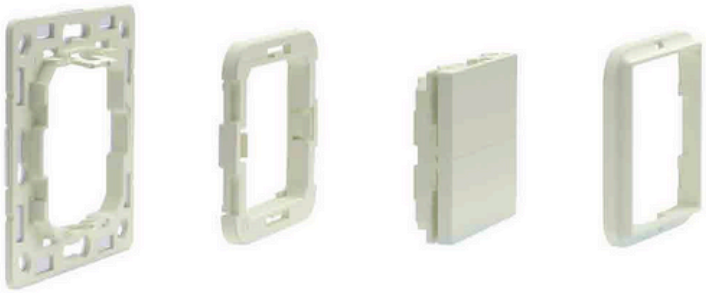

Shelly, Legrand

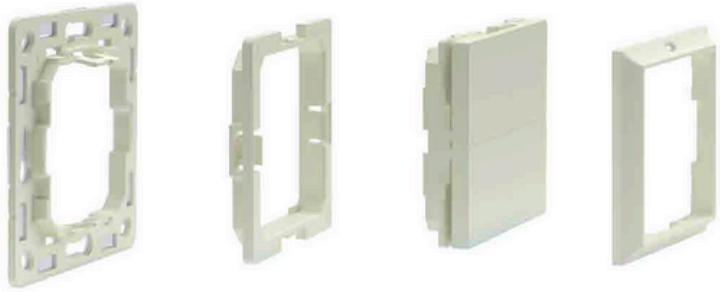

Accessories

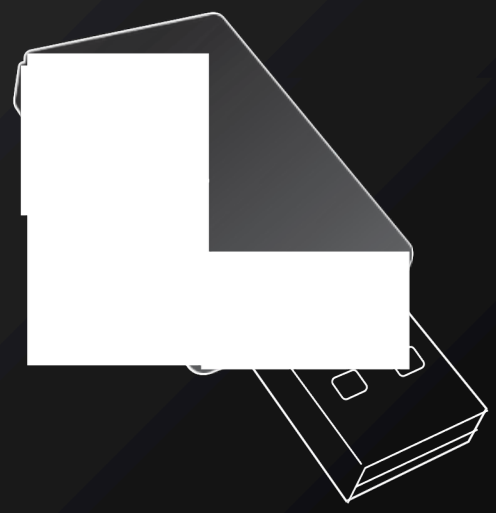



GLOBAL



Shelly
Bypass

Working voltage	**230 V~**
Compatible with	**- Shelly 1L** **- Shelly Dimmer 2**
Size (HxWxD)	**39x23x13 mm / 1.54x0.91x0.51 inch (without wires)**

more info

GLOBAL



Shelly
Bypass for 1L/2L

Working voltage	**230 V~**
Compatible with	**- Shelly 1L Gen3** **- Shelly 2L Gen3**
Size (HxWxD)	**39x23x13 mm / 1.54x0.91x0.51 inch (without wires)**

more info

GLOBAL




Shelly
Bypass for Dimmer

Working voltage	**230 V~**
Compatible with	**- Shelly Dimmer Gen3**
Size (HxWxD)	**39x23x13 mm / 1.54x0.91x0.51 inch (without wires)**

more info

GLOBAL



Shelly
RC Snubber

Capacitance	**0.1 µF**
Resistance	**100 Ω**
Rated voltage	**600 V~**

more info

GLOBAL



Shelly
BLU Gateway

Power supply	**5 V⎓ (from USB Type-A port)**
CPU	**ESP32**
Flash	**4 MB**

more info

GLOBAL



Shelly
BLU Gateway Gen3

Power supply	**5 V⎓ (from USB Type-A port)**
CPU	**Shelly ESP32 C3**
Flash	**8 MB**

more info



GLOBAL



Shelly
Plus Add-on

Add-on for Shelly Plus devices. Can be used with up to five DS18B20 sensors or one DHT22 sensor.

more info

GLOBAL



Shelly
Temp. Sensor DS18B20

Can be used with Shelly Plus Add-on for measuring precise temperature.
Sizes:
- 1 m
- 3 m

GLOBAL



Shelly
LoRa Add-on

Power supply	**3.3 V (from a compatible Shelly device)**
Size (HxWxD)	**40x42x11 mm / 1.58x1.66x0.44 inch**
Weight	**10 g / 0.4 oz**
Range	**Up to 5 000 m / 16 400 ft (depends on local conditions)**

A compact long-range communication add-on for Shelly Gen3 and Gen4 devices*.

*Supporting devices

Shelly Gen3 Devices (1.6 firmware):
- Shelly 1 Gen3
- Shelly 1PM Gen3
- Shelly 2PM Gen3
- Shelly Shutter
- Shelly EM Gen3
- Shelly Dimmer 0/1-10V PM Gen3
- Shelly DALI Dimmer Gen3
Shelly Gen4 Devices (1.6 firmware):
- Shelly 1 Gen4
- Shelly 1PM Gen4
- Shelly 2PM Gen4

more info

GLOBAL



Shelly
LAN Switch

Power supply	**110 - 240 V~**
Size (HxWxD)	**96x53x59 mm / 3.78x2.01x2.32 in**
Weight	**87 g / 3 oz**
Ethernet ports	**5 x RJ45 connectors**
Certifications	**LVD, RED, EMC**

more info



GLOBAL



Shelly
Shelly 50 A Current Transformer Clamp

Working voltage **230 V~**

Compatible with **- Shelly Pro EM-50**
- Shelly EM Gen3

GLOBAL



Shelly
Shelly 400 A Current Transformer Clamp

GLOBAL



Shelly
Shelly 80 A Solid core Current Transformer

GLOBAL



Shelly
Shelly 120 A Current Transformer Clamp

EU
ANZ




Shelly
Wall Display Stand White / Black

A tabletop stand for Shelly Wall Display setting the display under 35° viewing angle for ease of interaction.

Power supply **230 - 240 V~ 50/60 Hz**

Size (HxWxD) **87x87x113 mm / 3.43x3.43x5.24 inch** more info


Wall Switch for smart device

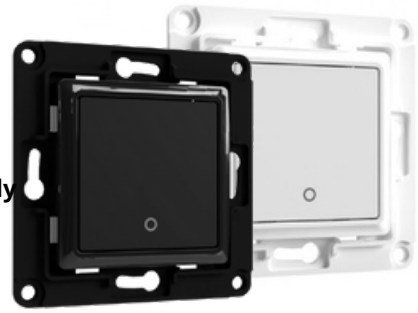

Designed to facilitate your specific automation needs and developed with the smallest details in mind, you can now create a custom wall switch for your Shelly device, and save on space and money!

GLOBAL

FITS INTO THE TINIEST SPACES!
Compact dimensions and simple wiring that can fit into any existing switch console or even the tiniest spaces.

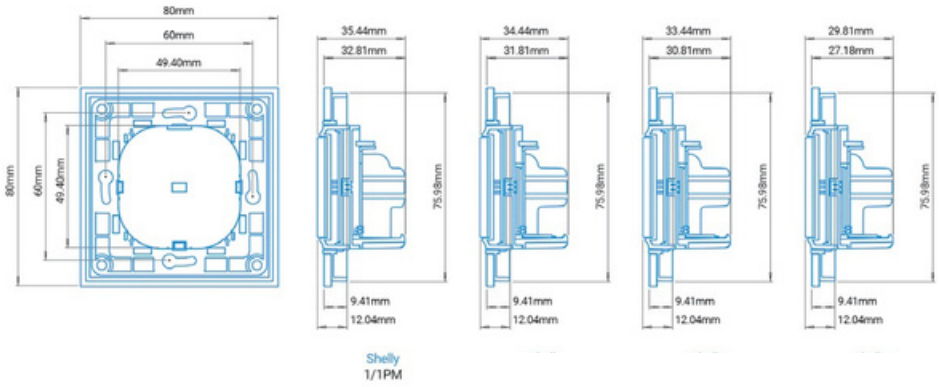



HIGHLY CUSTOMIZABLE!

Each Shelly Wall Switch for Smart device comes with corresponding holders. You can choose the device holder that you need to fulfill your automation project.



Device holder



Switch buttons




Switch frame




Frame Plate


AVAILABLE SWITCHES*:



Shelly Plus, Gen3 and Gen4 Series*




Shelly Plus, Gen3 and Gen4 Series*




Shelly Plus, Gen3 and Gen4 Series*

AVAILABLE FRAMES*:

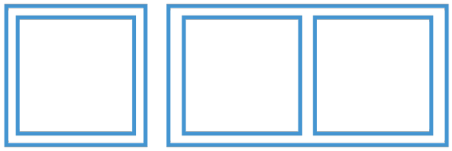

Single frame **Double frame**

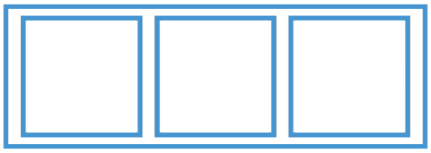

Triple frame

AVAILABLE COLORS:



White



Black

*Shelly Wall switches and Shelly Wall frames are sold separately!



Shelly Wall Socket EU

EU

It can fit into any existing wall socket console or even the tiniest spaces due to its compact dimensions and simple wiring. Type F/Shuko.

*** There is no relay device included in the package.**



Shelly Wall Socket UK

UK

Shelly Wall Socket can fit into any existing wall socket console or even the tiniest spaces due to its compact dimensions and simple wiring. When combined with the Shelly Wall Switch, your home acquires a beautiful, unified interior design. United Kingdom standard. Type G/BS 1363

*** There is no relay device included in the package.**



DOMOTIKLED

Shelly | Explore the POSSIBILITIE S

shelly.com